

Analysis of Wear and SEM Characteristics on Ferrous Composites Through Powder Metallurgy Method

Elayabharathi. M

Mechanical Department,

St. Joseph College of Engineering And Technology

Arun Kumar. R

Mechanical Department,

St. Joseph College of Engineering And Technology

Abstract:- Iron is the most commercially used metal in various fields from the ancient period. Nowadays its application in the marine and aerospace fields gets reduced gradually due to the density and ease of corrodibility nature of iron. In this study the iron properties are optimized without compromising its hardness and strength. The metal matrix is formed in iron by adding alumina and bagasse fly ash as an alloying element. Though, this method is done by powder metallurgical route. So, we can reduce the material loss during production. Also, experimental analysis is done on composite material after the sintering process at austenitization temperature. The wear test are taken for composite to check mechanical properties and the SEM is taken to understand the fine dispersion of alloying element in the composite. Finally, the samples are benchmarked with each other to identify the economically benefitable and effective ratio on composite material.

Keywords: Iron, Density, Metal matrix, Alumina, Bagasse fly ash, Powder metallurgy, Austenitization, Mechanical properties, SEM.

1. INTRODUCTION

Powder metallurgy technique is the unconventional and economical way of producing FMC. But, with the stir casting technique, it is difficult to produce a particulate reinforced composite. In this present method suitable modifications were carried out on powder metallurgy method to take care in production of composite and segregation of reinforcing particle. But, when compared to the present method, particle infiltration is relatively a difficult process. The requirement of composite material has gained popularity in these days due to their various properties like low density, good wear resistance, good tensile strength and good surface finish. Among various particulates used, fly ash is one of the least expensive and low density reinforcement available in huge quantities as solid waste by product in thermal power plants. [1] Materials with good strength to weight ratio are becoming very essential in modern engineering designs especially for automotive and aerospace applications where 4 improved machine efficiency and reduced fuel consumption are critical requirements to be satisfied. Also, modern infrastructures, equipment and machineries that are currently developed require materials that have a good combination of properties to match service demands. [2] Titanium alloys are used in aerospace and automotive applications because of its high specific strength, stiffness and good machinability but its wear resistance is inadequate. To eliminate this property lag Boron Carbide (B₄C) ceramic particles are reinforced with Ti-6Al-4V through powder metallurgy route (PM). Reinforcement particles are mixed with base alloy for the weight percentage of 0, 5 and 10 so as to analyze the effect of

reinforcements on mechanical, corrosion and wear properties. [3] The powder metallurgy helical gear has been applied on power take off and the finite element method is used on analysis of the characteristic of the transmission gear. The transmission efficiency experiment has been done to prove that Powder metallurgy gear transmission has high efficiency, long service life, and low manufacturing cost and enhance the power transmission capability. [4] Magnesium and Magnesium alloys have attracted immense attention as a biomedical implant material due to favourable mechanical properties and biocompatibility. Biodegradable nature of Magnesium dismisses the need of revision surgery for removal of implant. Porous Mg- foams are advantageous as presence of pores 5 allows the higher degree of Osseo integration. The mechanical properties of the porous foam material is a function of its density, thus a Finite Element Method (FEM) approach is required to predict the behaviour of Mg- foam under various stresses for real-time application. The author has attempted to quantitatively assess the mechanical properties of Mg foam with 40-45% porosity with 100- 300 µm pore size. [5] Concrete is the single most widely used construction material in the world today. It is used in buildings, bridges, sidewalks, highway pavements, house construction, dams, and many other applications. The key to a strong and durable concrete are the mix proportions between the various components. Less cement paste can lead to more voids, thus less strength and durability while more cement paste can lead to more shrinkage and less durability. The gradation and the ratio of fine aggregates to coarse aggregates can affect strength and porosity. The mix design should also achieve the desired workability of concrete so as to prevent segregation and allow for ease of placement. [6] Crushing plant is one of important processing units in mining industry. Process sequences in mineral mine processing are started with crushing plant unit, to reduce bigger mineral size into desired size to use in the next processing. In the iron ore mining industry, fine iron ore waste is produced within 30% of total feeds in crushing plant unit.[7] The reinforcement material used in this study is iron mill scale particles, while the hybrid matrices 6 are silica sand, magnesia, and bentonite clay. Iron mill scale particles were sourced from Universal Steel Nigeria Limited located in Ogba, Lagos. Silica sand was obtained from the beach of the Lagos Atlantic Ocean (bar beach). [8] Aluminum matrix composites (AMCs) are the competent material in the industrial world. Due to its excellent mechanical

properties, AMCs is widely used in aerospace, automobiles, marine etc. especially in the defence application, are continuously striving hard to find the materials that suit their specific requirements. Improvement in production methods and finding the alternate materials are a few options to meet the above requirement. [9] The process of drilling is commonly used in modern manufacturing, as most of the produced parts contain bore holes or threads. When drilling conventional steel materials, a number of recommendations [8, 9, 10, 11] can be found regarding tool geometry and cutting parameters, both of which play an important role in improving this process. Nevertheless, in the case of difficult-to-machine materials, such as sintered iron based powder metallurgy steels, the drilling process is still part of a less researched area of manufacturing science. It is all despite the fact that these materials are becoming increasingly common due to their favorable properties. [10] In the present research of a systematic study on Fe-Al₂O₃ Metal Matrix composites (MMNCs) prepared by Powder Metallurgy have been reported. The experimental studies have been carried out to correlate to show the effect of mechanical properties. It is expected that the outcome of the experimental studies will be help as in designing and developing Metal Matrix composites for critical industrial applications.

2. EXPERIMENTAL RESEARCH

Figure 1: SEM image for 6% alloying element

In sample 2 the alloying element is 12% (6% Al₂O₃ + 6% of

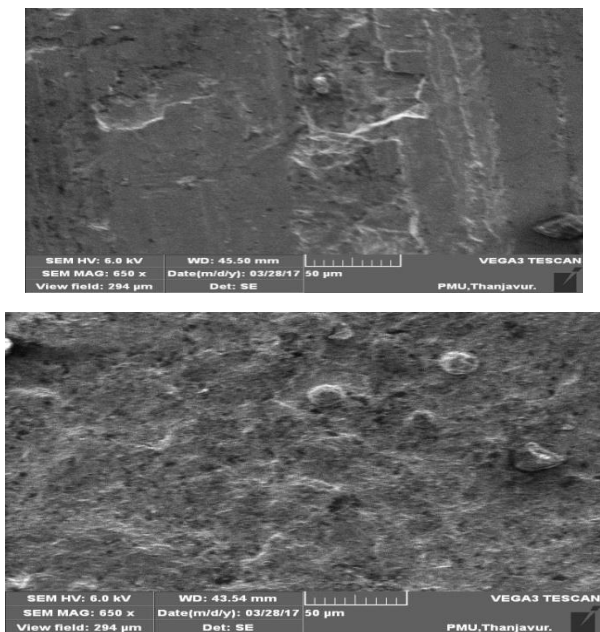


Fig. No: 2 SEM Image For 12% of Alloying Element

When analyzing the sample 3 the presence of 18% of alloying element is not finely dispersed. But, when comparing with previous sample the wear properties are reduced. But, it will be more than sample 1. The porous hole was reduced gradually in all samples. This is due to increase in fly ash content.

Preparation of Test Specimens. Iron metal powder having 92.5% purity and particle size in the range of 250-300 mesh, active aluminum oxide having particles size in the range of 250mesh and bagasse fly ash of 250 mesh are used as starting materials. Composite selected for present investigation contains aluminum oxide (Al₂O₃) and fly ash in 3, 6 and 9% by weight. Mixed powders were ball milled dry with the powder to ball ratio of 1: 2 using ceramic balls as the grinding and mixing media. Mixed powders were compacted using a hydraulic press under a constant load of 100 bar. Green compacts were sintered in the temperature 1150°C for 3 hours at a heat rate of 0.5 deg/min. After sintering, the compacts were machined on bench grinder.

3. RESULT AND DISCUSSION

3.1 SEM Analysis

Samples of MMCs for metallographic examination were prepared by grinding through bench grinder and different size of grit papers. The microstructure observed by using scanning electron microscope (SEM-PMU Thanjavur)

The sample1 is having 6% of alloying element (3% of Al₂O₃ + 3% of fly ash). The powder alumina got mixed with iron metal powder during mixing. Even though the size of fly ash is 250 micron it will segregate in some place. But due to segregation it exhibit poor wear resistance properties.

fly ash). Here, there is a fine dispersion of material we can shown in figure 2. The materials are segregate in one corner but the properties are quit be improved for this sample. Even, the wear resistance is also more compared to other samples.

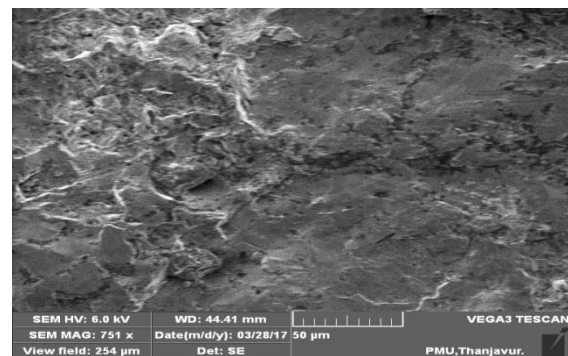


Fig. No: 3 SEM Image For 12% of Alloying Element

3.2 Wear analysis Specification

Cylinder size	:	150	mm
diameter & 500 mm length	:		
Material of coarser abrasive sheet	:	60	grade
Equivalent revolution	:	84	times
Rotational frequency	:	40 +/- 1	rpm
Load applied	:	1kg	

s.no	Sample ID	Initial weight (g)	Final weight (g)	Abrasion loss (g)	%	RANK
1	Fe 94% + Al ₂ O ₃ 3 % + FLY ASH 3%	13.5341	13.0448	0.4893	3.61	3
2	Fe 88% + Al ₂ O ₃ 6 % + FLY ASH 6%	14.1526	13.6968	0.4558	3.22	1
3	Fe 82% + Al ₂ O ₃ 9 % + FLY ASH 9%	13.7822	13.3316	0.4506	3.27	2

Fig no: 4 wear properties table for all samples

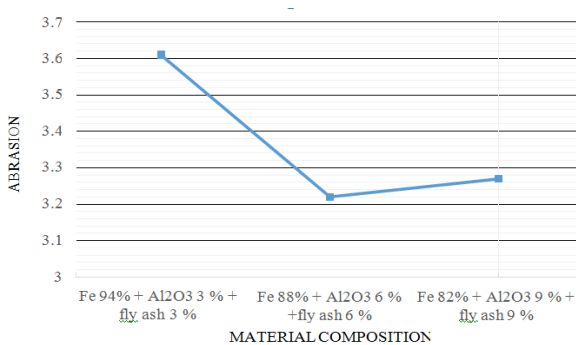


Fig no: 5 wear properties graph for all samples

Since the addition of alloying element shows a satisfactory effect in improving the wear resistance. This is to be expected because both alumina and fly ash have excellent tribological properties. The aluminium oxide is hard abrasive material and fly ash is excellent filler material. Fig no: 5 photo copy of wear tested samples



While comparing the three samples with each other, the sample 2 (Fe 88% + Al₂O₃ 6% + fly ash 6%) exhibit good resistance against wear. But, sample 3 wear resistance value was reduced. Various other parameters also affect the resistance properties. As from the literature survey increases in percentage of alloying element will reduce properties of the composite.

4. CONCLUSION

Based on the research and investigation of the ferrous composites, obtain that for dispersion of alloying metal into the matrix the powder is to be mixed in a ball mill and mixing time is a major parameter in alloying. The powder that used for the composite should have greater in grain

size (i.e.) above 100 microns then only the metal can formed during compaction. Else, the binder should be added without affecting properties of the composite metal. Sintering process will take place at suitable temperature then only the porosity can be avoided also the mechanical properties can be improved the sintering of iron composite is than after a coating is made on the material by aluminium paint to avoid oxide formation on surface. Even the wear for sample is ultimate than other having the abrasion of 3.22% due to presence of fly ash. so, it will suitable for bearing applications. The sample 3 is having the average mechanical properties with excellent surface finish. So, it suitable for making furniture's and window frames. Sample 2 will have superior mechanical properties. So, it will be a good replacement for cast iron with reduced porosity. It will economically suitable one. Also, sample 3 has good surface finish.

5. REFERENCES

- [1] Viney Kumara, Rahul Dev Gupta.N, K.Batrab (2016) "Comparison of Mechanical Properties and effect of sliding velocity on wear properties of Al 6061, Mg 4%, Fly ash and Al 6061, Mg 4%, Graphite 4%, Fly ash Hybrid Metal matrix composite" 3rd International Conference on Materials Processing and Characterisation (ICMPC 2014).
- [2] Kenneth Kanayo, Alaneme, Michael Oluwatosin Bodunrin , Adebimpe A. Awe (2015) "Microstructure, mechanical and fracture properties of groundnut shell ash and silicon carbide dispersion strengthened aluminium matrix composites" Journal of King Saud University – Engineering Sciences (2016) xxx, xxx-xxx King Saud University.
- [3] K. Soorya Prakasha, P.M. Gopala, D. Anburoseb, V. Kavimania (2016) "Mechanical, corrosion and wear characteristics of powder metallurgy processed Ti-6Al-4V/B4C metal matrix composites" Ain Shams Engineering Journal xxx (2016) xxx-xxx.
- [4] XIE Hai-donga, YAO Hao-weib, ZHANG Liangc (2013) "Research on Powder Metallurgy Gear Lifting Fire Tanker Performance" Procedia Engineering 52 (2013) 453 –457.
- [5] T. Hanuma Reddy,b Snehashis Palb, K. Chaitanya Kumarc, M. Krishna Mohana, Vanja Kokolb, (2016) "Finite element analysis for mechanical response of magnesium foams with regular structure obtained by powder metallurgy method" International Conference on Manufacturing Engineering and Materials, ICMEM 2016, 6-10 June 2016, Nový Smokovec, Slovakia.
- [6] Shehdeh Ghannam , Husam Najmb, Rosa Vasconezc (2016) "Experimental study of concrete made with granite and iron powders as partial replacement of sand" Sustainable Materials and Technologies9 (2016)1-9.
- [7] Kusno Isnugroho , David C. Birawidha (2016) "The production of pig iron from crushing plant waste using hot blast cupola" Alexandria University, Alexandria Engineering Journal (2016) xxx,xxx-xxx.
- [8] Stephen Durowayea, Olatunde Sekunowoa, Abdulganiyu I. Lawala, Olusola E. Ojob (2016) "Development and characterization of iron mill scale particle reinforced ceramic matrix composite" Journal of Taibah University for Science xxx (2016)xxx-xxx.
- [9] David Raja Selvam J, Robinson Smart, D.S. Dinaharan. I (2013)"Synthesis and characterization of Al6061-Fly Ashp-SiCp composites by stir casting and compocasting methods" Energy Procedia 34 (2013) 637 – 646 10th Eco-Energy and Materials Science and Engineering (EMSES2012).
- [10] Miklós Czampaa, Sándor Markosa, Tibor Szalaya (2013) "Improvement of drilling possibilities for machining powder metallurgy materials" Procedia CIRP 7 (2013) 288 – 293 Forty Sixth CIRP Conference on Manufacturing Systems 2013.