

Corrosion Behaviour of Nickel Aluminium Bronze Alloy Due to the Influence of Chromium

P. Parameswaran^{1*} and Dr. P. S. Sivasakthivel

*Corresponding Author, ¹M.Tech. Student.

School of Mechanical Engineering,

Shanmuga Arts, Science, Technology and Research Academy (ASTRA University),
Thanjavur, Tamil Nadu - 613 401, India.

Abstract—The issue of corrosion is a major problem on equipments failure and damage in industrial that would affect the safety and efficiency of the equipments. Especially, materials used in marine environments have to withstand corrosion and need more hardness to withstand corrosion. Nickel-aluminium bronze (NAB) alloys show good corrosion resistance under marine conditions. Therefore material requirements to withstand such a high corrosive environment are most important. Along with these, cost effectiveness also considered in the usage of material. Many papers gives the corrosion resistance of behavior of NAB alloys in sea water or 3.5M NaCl solution in detail manner. But the alternate material to NAB is not studied as copper is the material shows very high corrosion resistance in sea water. In order to enhance the properties of NAB alloy, chromium is added additionally and excluding iron, manganese and bronze of the NAB alloy. This paper will be focusing on the influence of chromium addition to the aluminium nickel alloy in the corrosion resistance properties and hardness. Chromium is added in 4%, 8% and 12% through powder metallurgy route. The specimen prepared for the corrosion testing by sintering and hot – extrusion. The chromium addition can be seen in the microstructure of the extruded specimens. The electro-chemical corrosion test was carried out in potentiostat in order to find out the corrosion properties of the alloys. 3.5M NaCl is used as the electrolyte during the electro-chemical corrosion test. The corrosion properties were increased than the available alloy composition as per ASTM B505M – 14. Further, the micro-vicker's is done which shows that the micro-hardness also has got increased due to the addition of chromium.

Keywords—NAB ALLOYS, HOT-EXTRUSION, ELECTRO-CHEMICAL CORROSION, ASTM B505M-14.

1. INTRODUCTION

The aluminum bronzes comprise a wide range of compositions, and alloys can be chosen with a correspondingly wide range of properties to suit many types of duty. Infact, the mix of properties available is so varied that alloy selection needs to be carefully considered, and expert advice is always useful. Nickel-aluminum bronze known as NAB is a series of copper-based alloy with additions of 9% - 12% Al and 6% Ni and Fe. High corrosion resistance of this alloy has made it one of the most practical alloys in marine applications e.g. ship propellers [1,2]. Recently, a vast range of investigation have been carried out to study the corrosion behavior of the cast nickel-aluminum alloy [3,4] and it has been found that optimum corrosion resistant of the alloy in seawater can be obtained by controlling the micro-structure [5]. Meighet al. [6] declared crevice corrosion occurs in the nickel-aluminum bronze when it is not cathodically protected. It has been

reported that the rate of crevice corrosion of the alloy in seawater is about 0.7 - 1.0 mm y-1 [7,8]. The optimum mix of tested mechanical properties with ultimate tensile strength in the range of 325 MPa, elongation of around 60% and Rockwell hardness values of 46.5 - 63.7 HRc, making this alloy suitable as alternatives to steel in low/medium strength structural applications [9]. Structural applications are mostly based on ferrous materials, steels in particular. Findings have shown that aluminium bronzes are fast replacing contemporary steel materials for some specific applications especially in components for marine/sub-sea applications. The consumption of aluminium bronzes have increased sharply in the USA. And other countries due to their property of being non-rusting in marine environment as well as also their resistance to corrosion in highly aggressive environments. Aluminium bronze alloy construction for basic oxygen and electric arc furnace hoods, roofs and side vents was identified as a viable alternative for carbon steel construction for these equipments. The use of aluminium alloy was found to be as much as five times the life of comparable carbon steel. In propeller material stainless steel have been also used and it also has high corrosion resistance due to the presence of chromium. Thus, the chromium is added to the NAB alloy to improve its mechanical and corrosion resistance properties.

2. EXPERIMENTAL DETAILS

The metal powders are mixed in the ratio of 4%, 8% and 12% chromium keeping the other metal proportions constant which are 9.5% aluminium, 4% nickel. Copper is the base metal and its proportion are changed in accordance with chromium addition. The powders have the size of 44 microns and 325 mesh and have 99.98% pure. The three different compositions are ball-milled, compacted in UTM with 1:1 L/D ratio. The three specimens are then treated in muffle furnace at 850°C and the ageing time was 90 minutes. Further, the specimens are cooled in the furnace itself in order to get high strength. The hot – extrusion was done by the hydraulic press with the use and punch and die of 10mm diameter.

The extruded specimens are made to have 10mm diameter and 5mm thickness. The specimens were polished using the grade sheets of different scale from coarse to fine and etched with ferric chloride solution. The micro-vickers hardness(1Kg) and Rockwell hardness (1Kgf) are taken in separate specimens. A daheng software driven optical microscope was used to analyze the microstructures of the developed alloy. Prior to this, the specimen for the microscopy were mounted, grinded using a series of emery paper of grits

sizes ranging from 60 μm - 2400 μm , it was further polished using an ultrafine polishing cloth, its effectiveness was enhanced using polycrystalline diamond suspension of particle size 3 μm with ethanol solvent. The specimen was chemically etched by swabbing using acidified ferric chloride composing of 8 g of Ferric (II) Chloride, 50ml of HCl and 100 ml of water for 60seconds before micro- structural examination was performed using optical microscope.

3. RESULTS AND DISCUSSION

The already using NAB alloy is having corrosion properties i.e. it has the value of 65 μm as per [11]. This NAB alloy is used almost in every propellers of the ship which have been used in marine environments. The newly prepared combination with the addition of chromium has increased the corrosion resistance.

3.1. Density

The both theoretical and actual density of the samples was found. The calculated volume of the compacted specimens is 12.271cm³(L/D = 1). The density of the extruded samples were found to be higher than the sintered specimens and are listed in table.

3.2. Mechanical properties

For Rockwell hardness, it is measured in B-scale intender with load of 100Kgf, 1/16 inch steel ball intender. Micro-hardness reveals that the obtained hardness is much more than the existing NAB alloys. Thus, the chromium influences increase the hardness of the alloys.

Table 1. Powder Composition

No	COMPOSITIONS (weight %)			
	COPPER	ALUMINIUM	NICKEL	CHROMIUM
Specimen 1	82.5	9.5	4	4
Specimen 2	78.5	9.5	4	8
Specimen 3	74.5	9.5	4	12

Table 2. Density attained at various process stage


No	DENSITY (g/cm ³)			
	SINTERING		EXTRUSION	
	THEORITICA L	ACTUA L	THEORITICA L	ACTUA L
Specimen 1	7.2834	5.4038	7.2834	6.850
Specimen 2	7.2257	5.5466	7.2257	7.10
Specimen 3	7.1690	5.6195	7.1690	7.10

Table 3. Microhardness test results


No	HARDNESS			
	ROCKWELL		MICRO-VICKER'S	
	SINTERING G	EXTRUSION N	SINTERING G	EXTRUSION N
Specimen 1	67	76	98	128
Specimen 2	77	88	167	265
Specimen 3	89	97	240	318

3.3. Microstructures


The microstructure of the 3 different compositions shows that the chromium content increases as percentage of chromium addition increases. The micro structures are taken after the hot extrusion process.

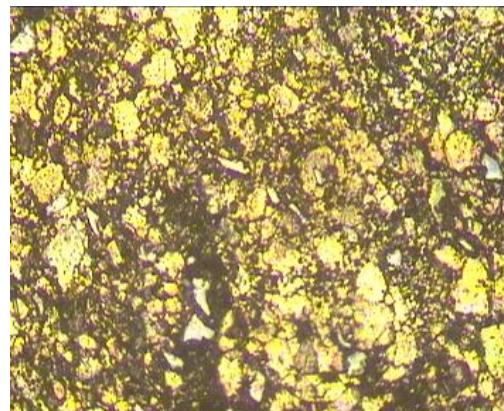

(a)

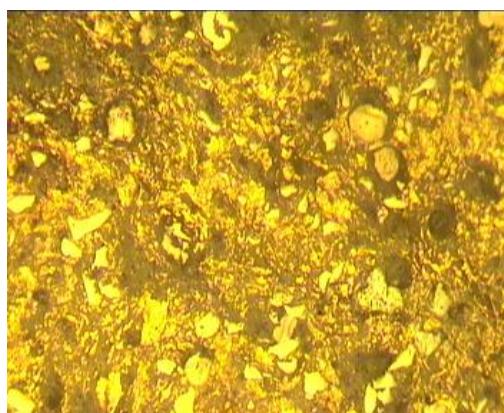

(b)

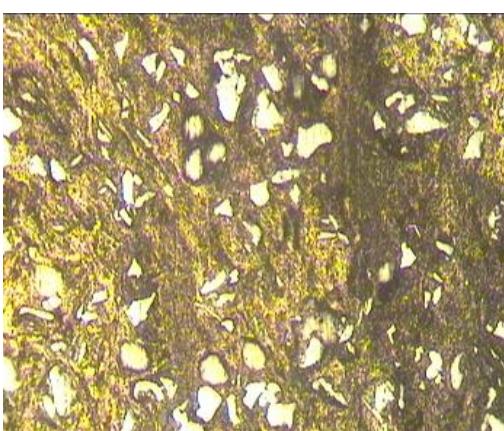

(c)

Fig. 1. Microstructure of (a) 4% Cr (b) 8% Cr(c) 12% Cr.

3.4. Corrosion Test

Corrosion test was carried out in potentiostat from which tafel graph is obtained and shown. A 3.5 wt% NaCl solution was prepared by analytical grade NaCl and distilled water to be used as test medium to simulate seawater in lab.

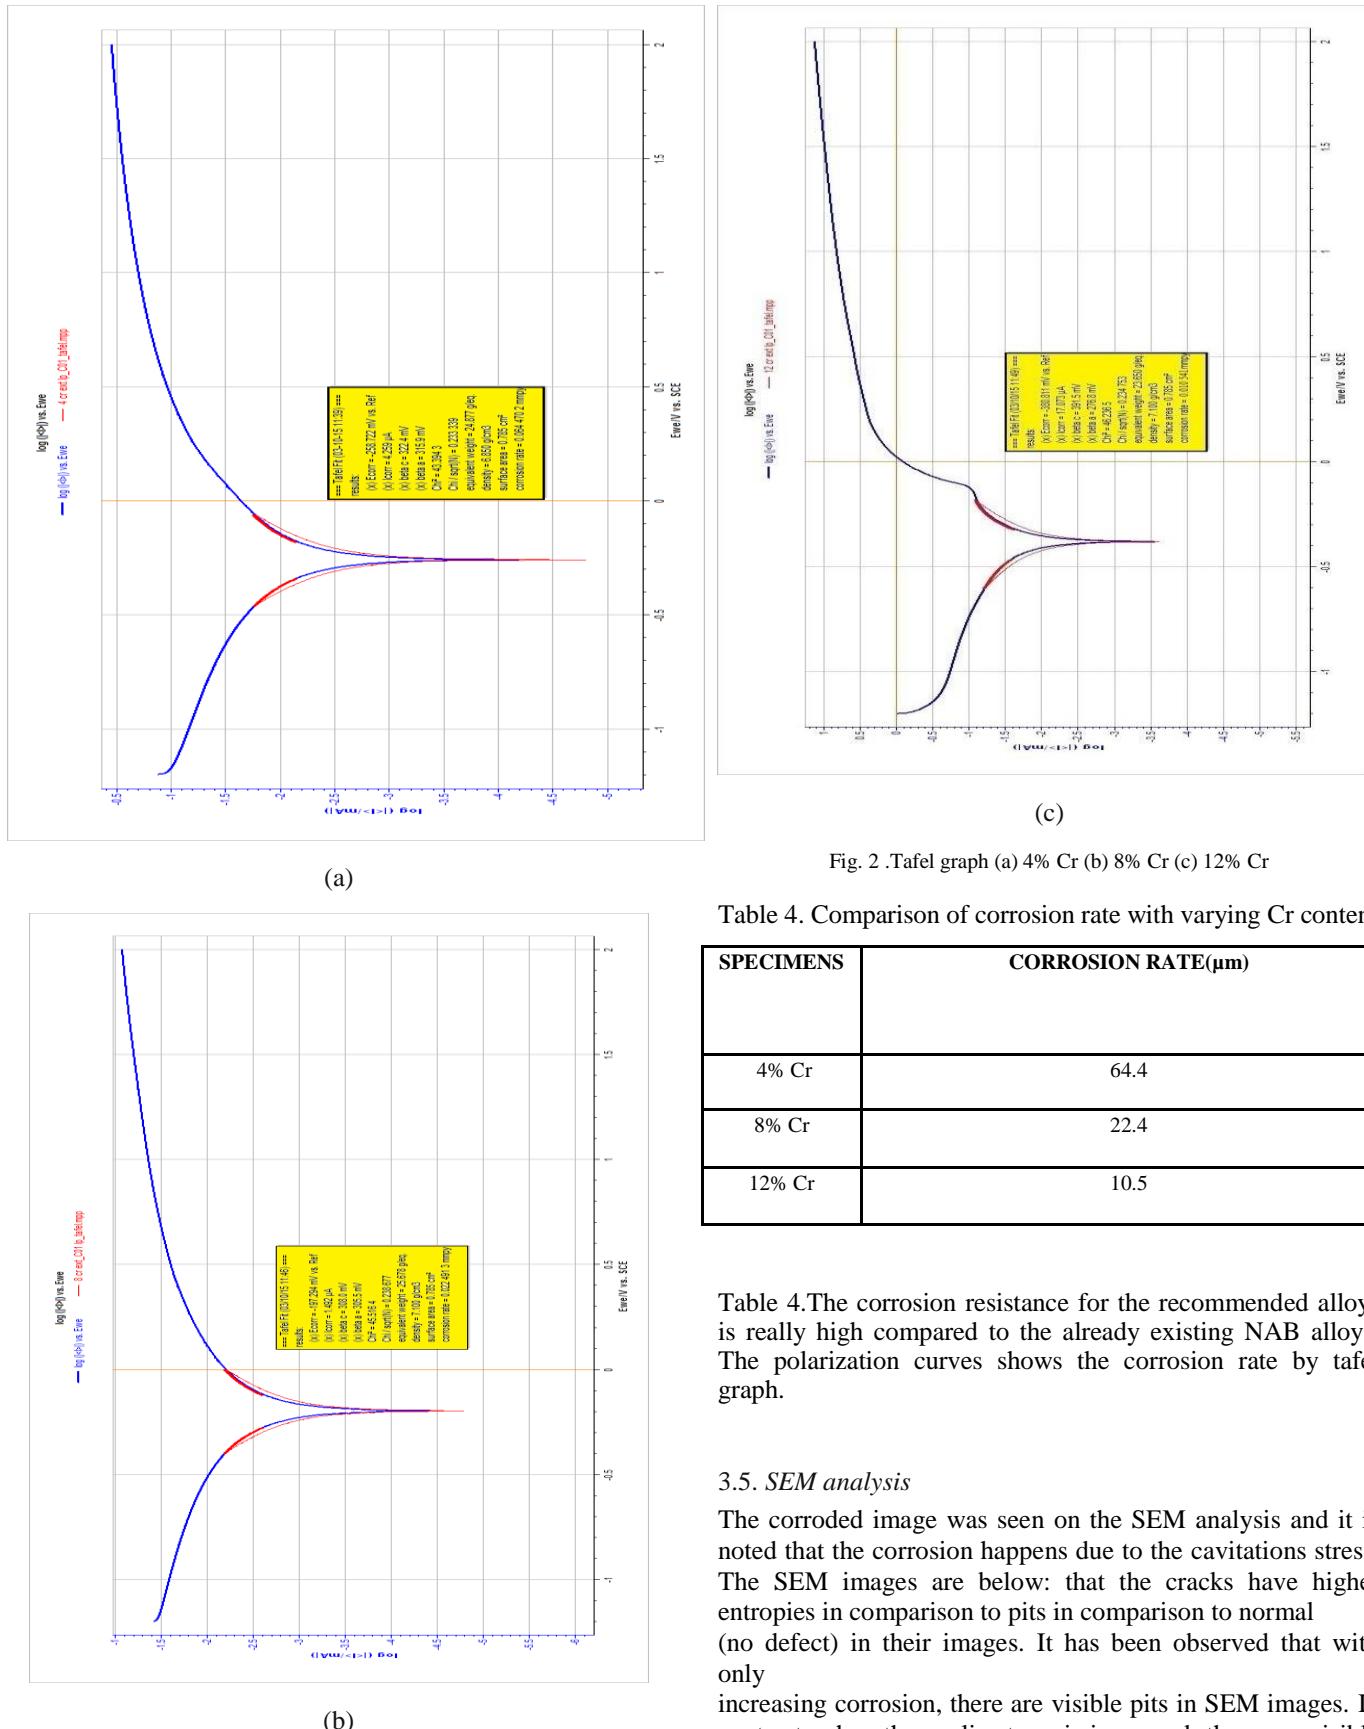


Fig. 2 .Tafel graph (a) 4% Cr (b) 8% Cr (c) 12% Cr

Table 4. Comparison of corrosion rate with varying Cr content

SPECIMENS	CORROSION RATE(μm)
4% Cr	64.4
8% Cr	22.4
12% Cr	10.5


Table 4.The corrosion resistance for the recommended alloys is really high compared to the already existing NAB alloys. The polarization curves shows the corrosion rate by tafel graph.

3.5. SEM analysis


The corroded image was seen on the SEM analysis and it is noted that the corrosion happens due to the cavitations stress. The SEM images are below: that the cracks have higher entropies in comparison to pits in comparison to normal (no defect) in their images. It has been observed that with only

increasing corrosion, there are visible pits in SEM images. In contrast, when the cyclic stress is increased, there are visible cracks and pits in SEM images. To provide a better illustration, a two dimensional projection of images (normal


(no defects), pits, cracks, and combination of pit-crack cases into the feature space is presented.

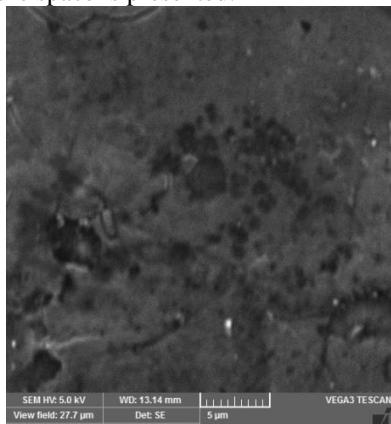

(a)

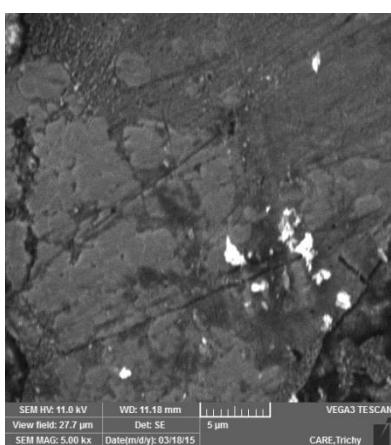

(b)

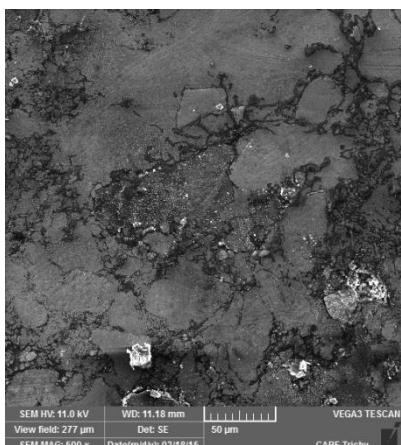

(c)

Fig. 3 SEM image (a) Specimen 1 - 4% Cr
(b) Specimen 2 - 8% Cr (c) Specimen 1 - 12% Cr

4. CONCLUSIONS

- Microstructure of the as hot-extruded sample is composed of α grains, globular precipitates of K phases with a small fraction of retained β 1 martensite and lamella eutectoid products.
- Corrosion resistance increases with the increase in chromium addition.
- Thus the chromium addition improves both hardness and corrosion.

REFERENCES

- [1] R. C. Barik, J. A. Wharton, R. J. K. Wood, K. S. Tan and K. R. Stokes, "Erosion and Erosion-Corrosion Performance of Cast and Thermally Sprayed Nickel-Aluminium Bronze," *Wear*, Vol. 259, 2005, pp. 230-242. doi:10.1016/j.wear.2005.02.033
- [2] A. Al-Hashem and W. Riad, "The Role of Microstructure of Nickel-Aluminium-Bronze Alloy on its Cavitation Corrosion Behavior in Natural Seawater," *Materials Characterization*, Vol. 48, 2002, pp. 37-41. doi:10.1016/S1044-5803(02)00196-1
- [3] J. A. Wharton and K. R. Stokes, "The Influence of Nickel-Aluminum Bronze Microstructure and Crevice Solution on the Initiation of Crevice Corrosion," *Elec-trochimicaActa*, Vol. 53, 2008, pp. 2463-2473. doi:10.1016/j.electacta.2007.10.047
- [4] M. D. Fuller, S. Swaminathan, A. P. Zhilyaev and T. R. Mcnelley, "Microstructural Transformations and Mechanical Properties of Cast NiAl Bronze: Effects of Fu-sion Welding and Friction Stir Processing," *Materials Science and Engineering A*, Vol. 463, 2007, pp. 128-137. doi:10.1016/j.msea.2006.07.157
- [5] H. S. Campbell, "Aluminium Bronze Corrosion Resistance Guide," Publication 80, Copper Development As-sociation, UK, July 1981, pp. 1-27.
- [6] H. Meigh, "Cast and Wrought Aluminium Bronzes-Prop-erties," *Processes and Structure*, 1st Edition, IOM Com-munications, 2000.
- [7] F. L. LaQue, "Marine Corrosion," Wiley, New York, 1975.
- [8] J. C. Rowlands, "Studies of the Preferential Phase Corrosion of Cast Nickel Aluminium Bronze in Seawater," Proceeding of 8th International Congress of Metallic Corrosion, 1981, p. 1346.
- [9] Corrosion Behavior of Heat Treated Nickel-Aluminum Bronze Alloy in Artificial Seawater, AshkanVakilipourTakaloo et al (Materials Sciences and Applications, 2011, 2, 1542-1555 doi:10.4236/msa.2011.211207)
- [10] C. B. J. Lawrence and K. S. Vimod, "Aluminium Bronze Alloys to Improve the System Life of Basic Oxygen and Electric Arc Furnace Hoods, Roofs and Side Vents," Fi-nal Report, US Department of Energy (DOE), 2006. doi:10.2172/896794
- [11] D Feron, "Corrosion Behavior and Protection of Copper and Aluminium Alloys in sea water"Published by WoodHead publishing limited, Abington Hall, Cambridge CB21 6AH England;: