

# IOT-Enhanced Vehicle Security and Recovery System

Mrs. M. Saritha Devi, Muddada Tarun Kumar, Mullangi Niharika Reddy,  
Dasari Midhun, Telidevara Sai Siva Kousik  
Department of Electronics and Communication Engineering,  
Godavari Institute of Engineering and Technology(A).

**Abstract**— The field of vehicle security and recovery has undergone a radical transformation with the incorporation of Internet of Things (IoT) technologies into vehicular systems. In order to meet the ever-changing challenges of protecting vehicles from theft and unauthorized access, this paper introduces an innovative IoT-enhanced vehicle security and recovery system. The suggested system creates an extensive network of sensors, actuators, and communication modules inside the vehicle infrastructure by utilizing the capabilities of the Internet of Things. Early detection of suspicious activity is made possible by continuous monitoring of the vehicle's surroundings and status made possible by real-time data collection and analysis. The system utilizes sophisticated algorithms to initiate prompt response mechanisms, such as remote immobilization and GPS-based tracking, in the event of a security breach.

**Keywords**— IoT (Internet of Things), Vehicle Security, Theft Prevention, GPS-based tracking, Real-time Monitoring, Remote Immobilization

## I. INTRODUCTION

Efficiency, connection, and security have all significantly improved as a result of the integration of Internet of Things (IoT) technologies into a variety of businesses in recent years. Vehicle security and recovery is one prominent sector where IoT has had a significant impact. The increased use of smart devices and networked systems has rendered conventional techniques for protecting vehicles from theft and illegal entry less effective. Statistics show that the recovery rate of stolen vehicles is still relatively low, which emphasizes the need for creative strategies to deal with this ongoing issue. This study offers an IoT-enhanced vehicle security and recovery system with the goal of revolutionizing the protection and recovery of vehicles, acknowledging the shortcomings of current security solutions. Using the Internet of Things' power, this system aims to build an extensive network of sensors, actuators, and communication modules integrated into the vehicles infrastructure by utilizing the power of the Internet of Things. This network makes it possible to continuously monitor the status and surrounds of the vehicle, which enables the early detection of potentially dangerous activity and security breaches. In the case of a theft or unwanted access, the suggested solution makes use of real-time data

collecting and processing to enable pre-emptive security actions like remote immobilization and GPS-based tracking. The system has the ability to utilize advanced algorithms to promptly trigger response mechanisms, hence reducing the likelihood of vehicle theft and improving the possibilities of recovery.

## II. LITERATURE REVIEW

- [1] D. Narendra Singh, K. Tejaswi (M. Tech) (2013): The security system in smart cars uses an ARM processor to allow real-time user verification using face recognition. In the event that authentication fails, the ARM starts a sequence of actions that include locking the car and notifying the owner via MMS, with optional GPS-based SMS location tracking.
- [2] R. Ramani, S. Vallarmathy, Dr . N. Suthanthira Vanitha, S. Selvaraju, R Thangam, M Thirupathi (2013): explained the tracking and locking system for vehicles makes use of GPS and GSM for tracking location and remote control. In the event of theft, SMS commands to the microcontroller enable engine immobilization and require password authentication for door access and restart.
- [3] Vikram Kulkarni & Viswa Prakash Babu – “Face Detection Embedded Smart Car Security System” (2015) The suggested system uses facial recognition to quickly identify possible thieves. It also sends an MMS notice to the owner and allows SMS tracking of the vehicle's location and speed in real time.
- [4] An IoT-Based Approach for Vehicle Theft Detection, K. Kaminozhi, D. Mukesh, and M. Ashok (2017): proposed This system makes it impossible for thieves to succeed in their theft efforts by enabling undetectable driver verification, real-time car tracking, location updates, and alerting neighbouring police stations in the event of suspected theft.

- [5] Champa Bhagavathi. R, Gowri. B. R, Kasturi. R, and Pooja. C. "Detection and Prevention of Vehicle Theft Using GSM and GPS,"(2016): implemented using a PIC18F46K22 controller, GPS, GSM, and one-time password modules, a high-level authentication vehicle theft detection and location system has been created. Future improvements could include functions for parental guidance and speed control.
- [6] A. Alshmarani and L. Jamjoom. "A Wirelessly Controlled Digital Car Lock for Smart Transportation." (2018): focused to create an Internet of Things (IoT)-based wireless car lock system that can be operated by a smartphone for shared vehicle use. Authorized users connect to the automobile via the internet to request access, get a digital code on their cell phones, and operate the car lock with a customized Android app that pairs with an embedded controller via Bluetooth.
- [7] "Adaptive speed control and vehicle security using speech processing," G. Kruti kamani, E. Esaki Vigneswaran: In order to lower the risk of auto theft, the suggested system included speech processing in its automobile security system for user-authenticated door control. It also uses radio frequency identification (RF-ID) technology to enforce speed limits in places that are designated for that purpose.

### III. METHODOLOGY

The process for creating an all-encompassing system architecture to incorporate sensors, actuators, and communication modules into the vehicle infrastructure is part of the IoT-enhanced vehicle security and recovery system methodology. This include deciding which parts to use to monitor the parameters of the vehicle and putting reaction mechanisms in place. In order to facilitate real-time data gathering and analysis and the early detection of suspicious activity, communication protocols are set up. In order to reduce security breaches and facilitate vehicle recovery, algorithms for remote immobilization and GPS-based tracking are being developed.

### BLOCK DIAGRAM

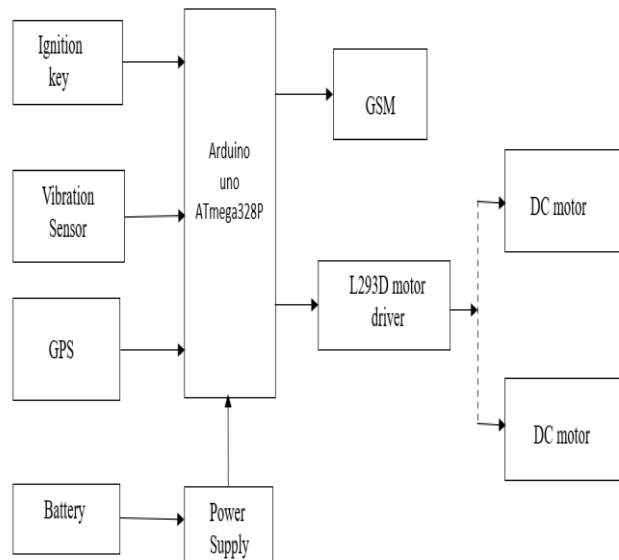


Fig.1. Block Diagram for IoT-Enhanced Vehicle Security and Recovery System

### CIRCUIT DIAGRAM

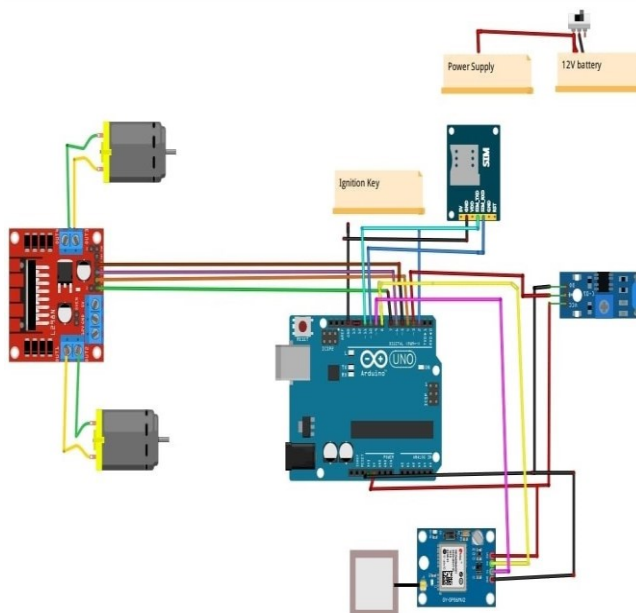


Fig.2. Circuit Diagram for IoT-Enhanced Vehicle Security and Recovery System



3. VIBRATION SENSOR:

Another term for the vibration sensor is a piezoelectric sensor. These flexible sensors are employed in a variety of process measurements. By converting to an electrical charge, this sensor leverages the piezoelectric effects to measure changes in force, temperature, acceleration, pressure, and strain. This sensor immediately measures capacitance and quality, which is also used to determine scents in the air. The method by which a vibration sensor detects system vibrations is through the use of various optical or mechanical principles. These sensors' typical sensitivity ranges are 10 mV/g to 100 mV/g, while they can potentially have lower and greater sensitivity levels. Depending on the application, the sensor's sensitivity can be chosen. Therefore, it is critical to understand the range of vibration amplitude levels to which the sensor will be subjected during measurements. In many different fields, vibration sensors are essential for safety monitoring, predictive maintenance, and performance optimization.



Fig. 6. Vibration Sensor

4. GSM MODULE:

Global system for mobile communication, or GSM, is a type of mobile communication modem. At Bell Laboratories, the GSM concept was invented in 1970. It's a mobile communication system that's commonly used worldwide. GSM uses the 850MHz, 900MHz, 1800MHz, and 1900MHz frequency bands to provide mobile voice and data services. It is an open, digital cellular technology. The time division multiple access (TDMA) technique was used in the development of the GSM system, which is a digital system designed for communication. After the data has been reduced and digitalized, a GSM transmits it via a channel carrying two distinct streams of customer data, each scheduled for a certain time slot. Data speeds ranging from 64 kbps to 120 Mbps can be carried by the digital system. A GSM modem is a gadget that can be used as a modem or a mobile phone to enable network communication between computers and other processors. In order to function, a GSM modem needs a SIM card and can connect to a network within the range that the network operator has subscribed to. It can be linked via Bluetooth, USB, or serial connection to a computer.



Fig.7. GSM Module

5. GPS:

The Global Positioning System (GPS) is a satellite-based system that calculates and measures its position on Earth using both satellites and ground stations. Navigation System with Time and Ranging (NAVSTAR) GPS is another name for GPS. For accuracy purposes, a GPS receiver must receive data from a minimum of four satellites. There is no information transmitted to the satellites by the GPS receiver. A GPS receiver locates itself accurately wherever it is by using a constellation of satellites and ground stations. These GPS satellites use radio frequency (1.1 to 1.5 GHz) to send information signals to the receiver. A GPS module or ground station may calculate its position and time using this received data. A GPS receiver determines its distance from GPS satellites by receiving information signals from them. A global positioning system (GPS) gadget uses trilateration, a mathematical method, to estimate the user's position, speed, and elevation. A GPS device can determine the precise distance or range to each GPS satellite being monitored by continuously gathering and examining radio signals from many GPS satellites and applying the geometry of circles, spheres, and triangles. Although it doesn't depend on angle measurement for its computations, trilateration is an advanced form of triangulation. GPS receiver module output is provided in NMEA string format, which is the industry standard for marine electronics. Defaulting to a 9600 Baud rate, it outputs serially on the Tx pin.



Fig.8. GPS

### 6. L293D MOTOR DRIVER:

An integrated circuit chip called a motor driver is typically used to regulate motors in autonomous robots. An interface between Arduino and the motors is provided by the motor driver. The L293 series of motor driver integrated circuits—L293D, L293NE, etc.—is the most widely utilized range. Two DC motors can be controlled concurrently using these integrated circuits. The L293D is made up of two H-bridge. The most basic circuit for managing a motor with a low current rating is the H-bridge. The motor driver IC will just be referred to as L293D. There are 16 pins on the L293D. The L293D is a 16-pin integrated circuit that has eight pins on each side that are used to operate a motor. Each motor has two INPUT pins, two OUTPUT pins, and one ENABLE pin. The L293D is made up of two H-bridge. The most basic circuit for managing a motor with a low current rating is the H-bridge.

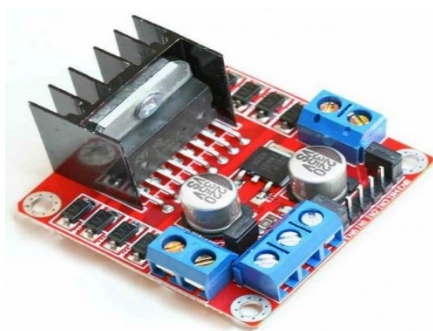


Fig.9. L293D Motor Driver

### 7. DC MOTOR:

Electrical energy can be transformed into mechanical energy by an electric machine called a direct current (DC) motor. Direct current is used by DC motors to transform electrical power into mechanical rotation. A rotor that is placed inside the output shaft of a DC motor is propelled by magnetic fields that result from the electrical currents generated. The motor's design and electrical input both affect the torque and speed of the output. A stator and an armature are the two main parts of a DC motor. In a motor, the armature rotates while the stator remains motionless. The armature of a DC motor rotates because of the magnetic field generated by the stator. An electromagnetic field that is aligned with the coil's centre is produced by a simple DC motor using a coil of wire that is current-driven and a set of stationary magnets in the stator. To focus the magnetic field, one or more windings of insulated wire are wrapped around the motor's core.

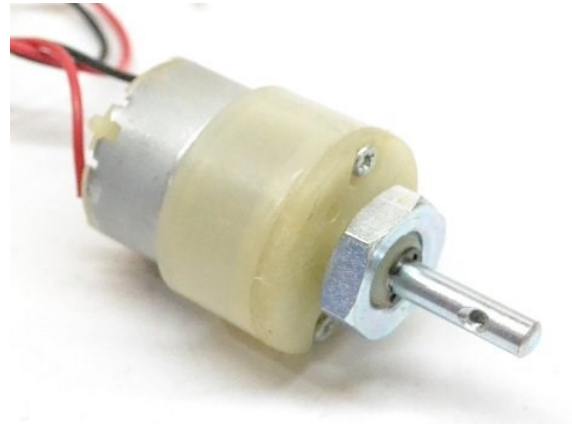


Fig.10. DC motor

## IV. RESULTS AND DISCUSSIONS

The suggested IoT-based vehicle theft prevention system's encouraging outcomes demonstrate how well it works to address the enduring problem of vehicle theft. The GPS tracking function of the device proved to be accurate during extensive testing in a variety of environmental conditions, and the GSM connectivity allowed for easy remote immobilization with commands from a smartphone. Simulations conducted in real environments showed how the technology might progressively slow down the car, making it more difficult for criminals to avoid being discovered and increasing the chances of recovery. Offering consumers peace of mind and authorities an effective tool for theft prevention and recovery, the system is a significant improvement in vehicle security because to its high reliability, cost-effectiveness, and user-friendly interface. As a result of these findings, vehicle security and recovery techniques have advanced significantly and the system's ability to reduce the risks of theft and unauthorized use has been demonstrated. The system shows how IoT technology might improve automobile security measures, although more testing and tweaking may be needed to maximize its efficiency.

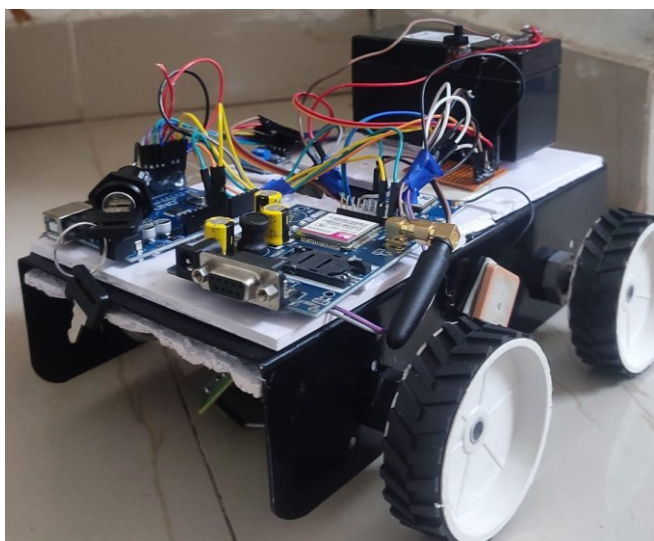


Fig.11. Hardware implementation for IoT-Enhanced Vehicle Security and Recovery system

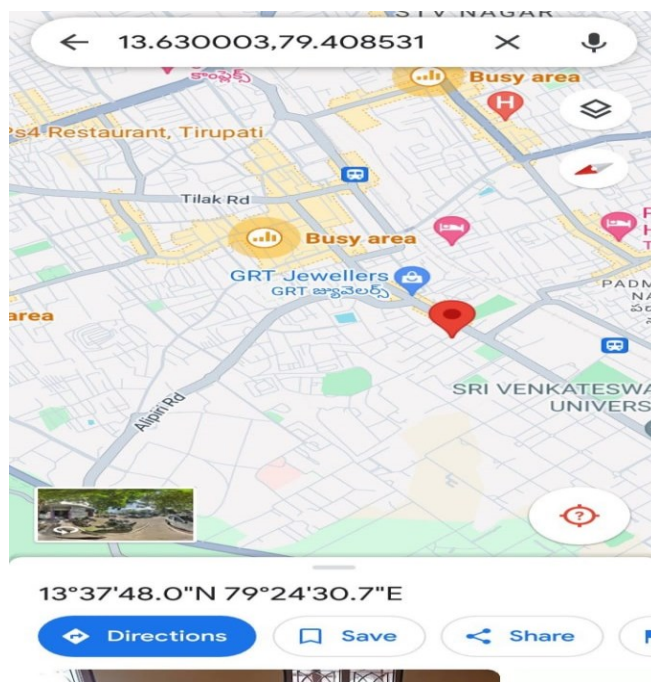


Fig. 13. Live location of Vehicle

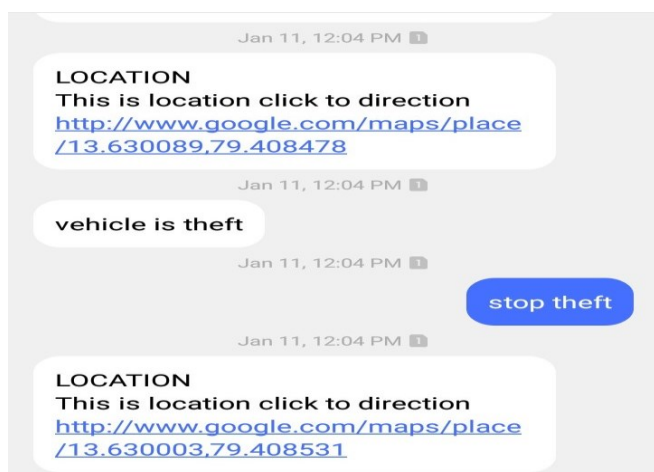


Fig. 12. Alert Message for IoT-Enhanced Vehicle Security and Recovery system

### V. FUTURE SCOPE

The Internet of Things-enhanced vehicle security and recovery system has a bright future ahead of it, with many opportunities for improvement and expansion. Adding sophisticated machine learning algorithms could be one way to help the system become more accurate and efficient at identifying and handling questionable activity. By guaranteeing that only those with the proper authorization can enter and operate the vehicle, the integration of biometric authentication technology could further improve security. Additionally, investigating the usage of blockchain technology for safe data storage and transfer could strengthen the system's defences against online attacks. Furthermore, the system's capabilities could be increased to incorporate predictive analytics for proactive threat mitigation and predictive maintenance.

### VI. CONCLUSION

To sum up, the suggested vehicle security system that makes use of GPS, GSM connection, and Internet of Things (IoT) technologies offers a strong defence against the widespread problem of vehicle theft. The system provides a dependable, affordable, and easy-to-use method of augmenting vehicle security through the integration of GPS for location tracking, smartphone commands, and an embedded controller interfaced with the ignition motor. Real-time communication with the owner is made possible by the seamless integration of various technologies, which also allows for quick theft detection.

By utilizing real-time data collecting and processing, the suggested IoT-enhanced system creates a strong network of sensors, actuators, and communication modules within the vehicle infrastructure, facilitating the early detection of suspicious activity. The system's advanced algorithms enable it to quickly initiate response mechanisms, such as GPS-based tracking and remote immobilization, when it detects a security breach. Accelerated recovery operations are facilitated by the slowing down of vehicle speed and immobilization. With its efficient way to prevent vehicle theft and greatly increased recovery prospects in the event of unwanted entry, this system represents a promising development in smart mobility.

## VII. REFERENCES

- [1] "Real Time Vehicle Theft Identity and Control System Based on ARM 9," D. Narendra Singh, K. Tejaswi (M. Tech), International Journal of Current Trends in Technology and Engineering (IJLTET), January 2013, Vol. 2, Issue 1, Page(s): 240–245.
- [2] Vehicle tracking and locking system based on GSM and GPS, R. Ramani, S. Vallarmathy, Dr . N. Suthanthira Vanitha, S. Selvaraju, R Thangam, M Thirupathi, I.J. Intelligent Systems and Applications, Vol. 5, Issue-9 August 2013, Page(s): 86-93, 2013.
- [3]. Vikram Kulkarni & Viswa Prakash Babu - Face Detection Embedded Smart Car Security System Special Issue of IJCCT, Volume 4, Issue 1, 2015, ISSN (ONLINE): 2231-0371, ISSN (PRINT): 0975-7449
- [4] An IoT-Based Approach for Vehicle Theft Detection, K. Kaminozhi, D. Mukesh, and M. Ashok, National Conference on Computational Intelligence System (NCCIS'17), March 2017, e-ISSN: 2455-5703, Global Research and Development Journal for Engineering
- [5] International Journal of Science, Engineering and Technology Research (IJSETR), vol. 3, p. 12, V. N. Kumar, V. S. Reddy, and L. P. Sree, "Design and development of accelerometer-based system for driver safety." In 2014.
- [6] Champa Bhagavathi. R, Gowri. B. R, Kasturi. R, and Pooja. C. "Detection and Prevention of Vehicle Theft Using GSM and GPS," Vol. 4, Issue 5, May 2016, International Journal of Innovative Research in Computer and Communication Engineering (An ISO 3297: 2007 Certified Organization).
- [7] A. Alshmarani and L. Jamjoom. "A Wirelessly Controlled Digital Car Lock for Smart Transportation." Learning and Technology at IEEE May 2018, Conference, ISSN: 17805861.
- [8]. Vision-Based Unmanned Aerial Vehicle Detection and Tracking for Sense and Avoid Systems, Krishna Raj Sapkota1, Steven Roelofsen, 2016. IEEE/RSJ International Conference on Robotic Systems and Intelligence (IROS)
- [9]. R. Ezhilarasie, Albert Alexe, Cloud Computing-Based Vehicle Tracking Information Systems, IJCST Vol. 2, ISSN: 2229-4333 (Print), ISSN: 0976-8491 initial issue, March 2011
- [10]. Antony, A. J., Balakumar, N., and Prabhu, B. A 2013 study on embedded systems and sensors in smart transportation.
- [11] "Adaptive speed control and vehicle security using speech processing," G. Kruti kamani, E. Esaki Vigneswaran, International Journal of Applied Engineering Research, Vol. 10 No.55, 2015.
- [12] M. A. A. Rashed, O. A. Oumar, and D. Singh, "A real-time GSM/GPS tracking system based on GSM mobile phone," IEEE Journal on Signals and Telecommunication, vol. 3, no. 1, pp. 65–68, March 2014.
- [13] Sandeep CH, Kumar S Naresh, Kumar P Pramod, "Security challenges and issues of the IoT system," Indian Journal of Public Health Research & Development (IJPHRD), vol. 9, Issue.11, pp. 748-753, December 2018.
- [14] Vehicle tracking and monitoring system to improve driving safety and security using IoT, Syed Musthak Ahmed and A. Anusha, IEEE International Conference on Recent Trends in Electrical, Electronics, and Computing Technologies, © 2017 IEEE, pp. 49-53, July 2017, DOI 10.1109-ICRTEECT.2017.35.