

# Performance on Partial Replacement of Fine Aggregate with Marble Dust Powder

Karan Kumar Quantth

Assistant Professor, Department of Civil Engineering, UIET, Kathua Campus, Jammu and Kashmir, India

Correspondence should be addressed to Karan Kumar Quantth

**ABSTRACT-** The construction buildings which are present in and around coastal area are severely facing lot of issues. This is due to penetration of sea salts. This leads to damage to Structure. The average NACL Concentration of sea water is about 3.5%. In this study, Marble Dust powder has been taken to analyze the chemical and physical properties of the concrete which is partially replaced with marble dust powder as fine aggregate by 10%, 20%, 30%, 40% and 50% by weight of fine Aggregate. After replacing this marble dust powder as fine aggregate, cylinders and cubes are casted. After casting these cubes and cylinders, they are used to know its both compressive as well as tensile strength by using compression test and split tensile strength for 7 days and 28 days.

**KEYWORDS-** Water Cement ratio, Cement Content, Gradation of the Aggregate, Consistency and marble dust.

## I. INTRODUCTION

Nowadays marble powder is a source which causes a lot of problems to the environment [1]. It is necessary to maximize utilization of marble waste in a range of sectors, especially the construction, agriculture, glass and paper industries would help to save the environment. Concrete is generally used in construction projects in the civil construction work because of its huge structural strength and firmness [2]. The over use of river sand for construction has a variety of unwanted social and eco-logical penalty, fine aggregate is main constituents of concrete and mortar in construction industry as there is a huge demand of sand it is becoming a limited material [3]. As natural sand deposits are depleting it is necessary to replace partially or fully of fine aggregate with alternative. As a solution for this various alternative are explored [4]. Before this study, different experiments are found the solutions on concrete composite materials. Natural resources are decreasing day by day from earth and rising wastes from industries generated simultaneously [5]. The eco friendly and consistent improvement for construction includes the use of non conventional and unusual waste materials, and use of waste material for reducing emissions in environments and decreasing the utilization of environmental resources [6]. Sand is ordinary form of fine aggregate used in concrete production. Marble powder is the waste which is generated from Marble finishing industries in construction which has similar physical and chemical actions of sand [7-9]. Marble powder is the byproduct of Marble factories; the sludge or wet powder is

obtained from the sprucing, dressing, and cutting of the marble stones, and also the fine marble powder that is left when dressing sprucing and cutting of the marble, is dropped into the landfills, watersheds, rivers, blind wells and also the seasonal rivers that are then administered by the rainwater to the agriculture lands so inflicting adverse effects on the soil and reducing the fertility of the soil, so by reducing the production of the annual crop [10-12]. The marble waste principally consists of boulders that are used as aggregates relying upon the sizes, and also the fine powder that isn't employed regionally and drops directly into the streams, wells, and watersheds that are then washed away by the rainwater [13] it absolutely was complete that out of fifty tons raw stone of marble the twenty tones it been waste whereas the thirty tones is the finished product. The waste marble powder may be a waste product [14-15].

## II. LITERATURE REVIEW

**Prof. Veena G. Pathan, Prof. Md. Gulfam Pathan, et al., (2014)**

Marble dust is a strong waste material created from the marble handling and can be utilized either as a filler material in bond or fine totals while planning concrete. It has been utilized as a substitution of fine totals in numerous writing works however this paper displays the achievability of the substitution of marble squander for bond to accomplish economy and condition sparing.

**GV Vigneshpandian, E Shruthi, C Venkatasubramanian and D Muthu, et al., (2017)**

This paper explores the quality properties of concrete samples cast utilizing waste marble dust as substitution of fine total. The marble pieces are finely pulverized to powdered and the degree is contrasted and regular fine total. Solid examples were thrown utilizing wmd in the research facility with various extent (25%, half and 100%) by weight of bond and from the examinations it uncovers that expansion of waste marble dust as a substitution of fine total barely enhances compressive, ductile and flexural quality in concrete.

## II. MATERIAL USED

### A. Cement

The cement used in this work is ordinary portland cement(43 grade). The specific gravity of cement is 3.15

### B. Waste Marble Dust

Fig. 1 shows the sample of marble dust. Wastes generated in the marble stone industry is proclaimed and used as Waste Marble Dust [17].

### C. Graded Fine Aggregate

Sand grains passing through a 4.75 mm sieve are called fine aggregates [18]. Natural sand is used as fine aggregate. Regionally available river sand compliant with zone II of IS: 383-19707 was used as fine aggregate having a specific gravity of 2.54 [19]. Table 1 shows the Sieve analysis of sand.

Particle size distribution curve is shown in Fig.2 Commonly sized, locally available well-graded aggregates larger than 4.75 mm and smaller than 12.5 mm are used as coarse aggregate. Fig.3 shows the particle size distribution curve:



Figure 1: Marble dust powder

Table 1: Sieve Analysis of Sand

A. Sieve size (mm)	B. Aggregate retained wt. (Kg)	C. %Wt. retained	D. Cumulative % Wt. retained	E. 100-cumulative passing %
F. 4.25	G. 0.039	H. 3.9	I. 3.9	J. 96.1
K. 2.36	L. 0.27	M. 2.7	N. 6.6	O. 93.4

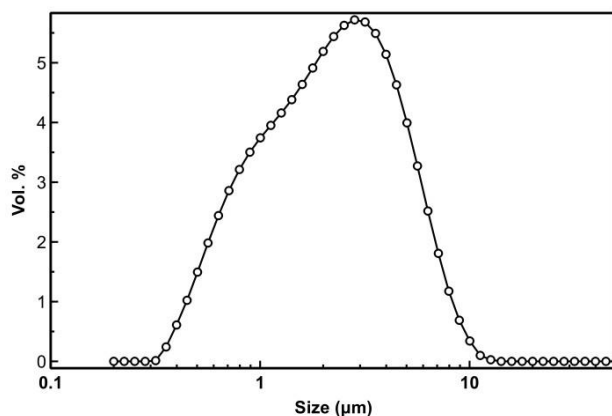


Figure 2: particle size distribution of marble dust

### D. Graded Coarse Aggregate

- If the penetration reading is less than 5 to 7 mm, prepare the paste again with more water and repeat the above procedure until the needle penetrates to a depth of 5 to 7mm.
- The percentage of the water with which the above situation is satisfied is called normal consistency.



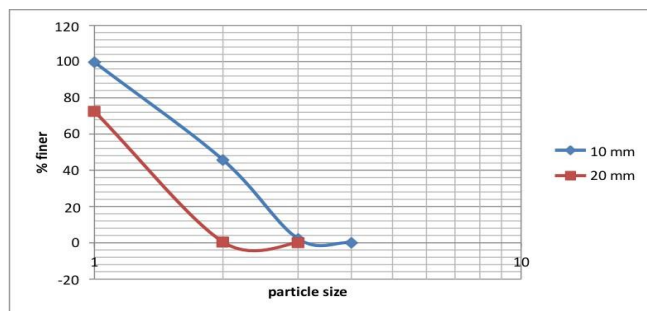


Figure 3: Particle size distribution of Coarse Aggregates

### E. Procedure

crushed stone of 20 mm and 10 mm size, taken from a local quarry with a specific gravity of 2.68 [20]. Water Portable water available at the site was used to prepare concrete in the entire project.

- Normal consistency of different binder mixes determined by using the procedure referring to IS 4031: part 4(1988): □ 300 gram of sample coarser than 150 $\mu$  sieve is taken.
- After applying oil to the surface of mould, paste was filled in the vicat's mould and was placed under the needle of vicat's apparatus.
- Release quickly the needle allowing it to sink in the paste and note down the penetration reading when the needle becomes stable.

Figure 4: Particle size distribution of Coarse Aggregates

## III. WORKABILITY OF CONCRETE

The final output results for different sample groups regarding slump values for fresh concrete are listed in table .The slump test was also conducted after 15 minutes to measure the slump loss from the time of original batching [21]. Results of workability shown in Table 2 below:

Table 2: Slump Test Results

GP GROUP	Slump Test	
	At 0 min	At 15 min
0 %	11 cm	09 cm
15 %	14 cm	12 cm
20%	17 cm	16 cm
25 %	19 cm	17 cm
30%	20 cm	18 cm

## IV. COMPRESSIVE STRENGTH

- For each series, five-set were cast to determine compressive strength. Each set comprises of eleven standard cubes out of which nine cubes were cast to measure the compressive strength after 07 days and 28 days. The size of the cube is as per the IS code 10086 – 1982.
- The results of compressive strength testing of laboratorycured cubes are presented below for First series with 30% cement replacement, Second series with 25% cement replacement ,third series 20% and fourth series 15% respectively. The strength values reported are the average of three test results. Results of Compressive strength shown in Table 3 below:

Table 3: Compressive strength

S.NO	% OF MARBLE POWDER	COMPRESSIVE STRENGTH OF CONCRETE (N/mm <sup>2</sup> )		
		7 days	14 days	28 days
1	5%	21.97	23.70	40.68
2	15%	17.50	18.55	25.77
3	25%	17.62	20.95	25.02
4	35%	17.82	18.97	22.20
5	45%	16.57	18.37	24.10
6	50%	17.97	19.75	29.90
7	100%	17.23	20	21.55

Compressive strength of concrete with various percentages of marble powder shown in Fig.5.

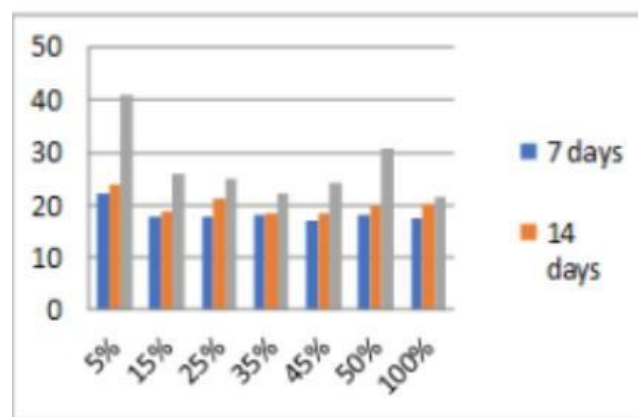


Figure 5: Various percentages of marble powder

## V. CONCLUSIONS

- The compressive strength of concrete is increased when we replace 5% of fine aggregate with marble dust powder and when we increase further the compressive strength start decreasing.
- When we add 5% of marble dust in partially replacing of fine aggregate and at 28 days after curing the compressive strength is to be found 40.68N/mm<sup>2</sup>.
- In replacement of fine aggregate with marble dust powder in concrete mix it boosts the compressive strength of the concrete.
- Test indicates that the waste marble powder can be used or utilized as partial replacement of fine aggregate in concrete.
- The marble powder is easily contaminates air and water and it pollutes environment if we use this in concrete will ease the problem of their disposal and environmental pollution.
- Cost of the concrete is also reduced when we use marble powder as partially. Hence its becomes economical
- The over use of river sand for construction has various unwanted social and eco-logical penalty, fine aggregate is one of the important constituents of concrete and mortar in construction industry as there is a huge demand of sand it is becoming a scarce material.

## REFERENCES

- [1] M.S.Shetty "Concrete technology", 3rd edition, S.Chand & company limited.
- [2] Properties of concrete by A.M.Neville.
- [3] IS 383-1970:Specification for coarse and fine aggregate from natural source of concrete, Bureau of Indian standards, New Delhi, India.
- [4] V.M Sounthararajan, A.Siva Kumar "Effect of the Lime Content in Marble Powder for [10] Production of High Strength Concrete" ARPN Journal of Engineering and Science.vol 8,No 4, April 2013.
- [5] N.Gurumurthy,"Influence of marble dust as partial replacement of cemen"International Journal of Engineering Researching Technology, vol 3, March 2012.
- [6] P.A Shirul, Ataur Rahman, Rakesh D.gupta,"Partial replacement of cement with Marble dust powder"International journal of research and studies vol 1, June 2012. [8]. Tanpreet Singh and Anil Kumar,"Influence of Marble Powder Mortar and Concrete Mix"vol 2, June 2011.
- [7] IS 516-1959: Methods of tests for strength of concrete, Bureau of Indian standards, New D Noha.M.Soliman,"Effect of using marble powder in concrete mixes on the behavior and strength of R.C slab" international journal of current Engineering and Technology. volume no.5 December 2010. Delhi, India.
- [8] Sharma, J. and Singla, S., 2014. Influence of recycled concrete aggregates on strength parameters of concrete. SSRG International Journal of Civil Engineering, 1(4), pp.20-24.
- [9] Singla, N., Singla, S., Thind, P.S., Singh, S., Chohan, J.S., Kumar, R., Sharma, S., Chattopadhyaya, S., Dwivedi, S.P., Saxena, A. and Issakhov, A., 2021. Assessing the Applicability of Photocatalytic-Concrete Blocks in Reducing the Concentration of Ambient NO<sub>2</sub> of Chandigarh, India, Using Box-Behnken Response Surface Design Technique: A Holistic Sustainable Development Approach. Journal of Chemistry, 2021.
- [10] Kumar, V., Singla, S. and Garg, R., 2021. Strength and microstructure correlation of binary cement blends in presence of waste marble powder. Materials Today: Proceedings, 43, pp.857-862.
- [11] Garg, R., Garg, R. and Singla, S., 2021. Experimental Investigation of Electrochemical Corrosion and Chloride Penetration of Concrete Incorporating Colloidal Nanosilica and Silica fume. Journal of Electrochemical Science and Technology, 12(4), pp.440-452.
- [12] Kansal, C.M., Singla, S. and Garg, R., 2020, November. Effect of Silica Fume & Steel Slag on Nano-silica based HighPerformance Concrete. In IOP Conference Series: Materials Science and Engineering (Vol. 961, No. 1, p. 012012). IOP Publishing.
- [13] Bhatta, D.P., Singla, S. and Garg, R., 2021. Microstructural and strength parameters of Nano-SiO<sub>2</sub> based cement composites. Materials Today: Proceedings, 46, pp.6743-6747. [14] Dhiman, S., Garg, R. and Singla, S., 2020, November. Experimental investigation on the strength of chipped rubberbased concrete. In IOP Conference Series: Materials Science and Engineering (Vol. 961, No. 1, p. 012002). IOP Publishing.
- [15] Khan, M.N., Singla, S. and Garg, R., 2020, November. Effect of Microsilica on Strength and Microstructure of the GGBSbased Cement composites. In IOP Conference Series: Materials Science and Engineering (Vol. 961, No. 1, p. 012007). IOP Publishing.
- [16] Fani, G.M., Singla, S. and Garg, R., 2020, November. Investigation on Mechanical Strength of Cellular Concrete in Presence of Silica Fume. In IOP Conference Series: Materials Science and Engineering (Vol. 961, No. 1, p. 012008). IOP Publishing.
- [17] Gatoo, A.H. and Singla, S., 2020. Feasibility of plastic and rubber emulsified road pavements & its contribution to solid waste management in India. Int J Adv Sci Technol.
- [18] Raina, S.S., Singla, E.S. and Batra, D.V., 2018. Comparative analysis of compressive strength and water absorption in bacterial concrete. International Journal of Engineering Development and Research, 6(3), pp.281-286.
- [19] Bhatta, D.P., Singla, S. and Garg, R., 2022. Experimental investigation on the effect of Nano-silica on the silica fumebased cement composites. Materials Today: Proceedings.
- [20] Singh, P., Singla, S. and Bansal, A., 2021. Evaluation of Land Use and Land Cover Transformation and Urban Dynamics Using Multi-Temporal Satellite Data. Geodetski list, 75(3), pp.257-279.
- [21] Kumar, A., Singla, S., Kumar, A., Bansal, A. and Kaur, A., 2022. Efficient Prediction of Bridge Conditions Using Modified Convolutional Neural Network. Wireless Personal Communications, pp.1-15.