

To Determine Process Parameter of Laser Cutting Machine: A Review

Suraj S Patel¹
Student

Department of Mechanical Engineering, LDRP-ITR
Gandhinagar, India.

Viraj H Patel²
Student

Department of Mechanical Engineering, LDRP-ITR
Gandhinagar, India.

Ketul M Patel³
Student

Department of Mechanical Engineering, LDRP-ITR
Gandhinagar, India.

Bhaumik A Patel⁴
Student

Department of Mechanical Engineering, LDRP-ITR
Gandhinagar, India.

Aseem A Patel⁵
Student

Department of Mechanical Engineering, LDRP-ITR
Gandhinagar, India.

Saumil C Patel⁶
Lecturer

Department of Mechanical Engineering, LDRP-ITR
Gandhinagar, India.

Abstract: -LASER(Light Amplification by Stimulated Emission of Radiation) cutting is one of the best technology developed for the cutting, drilling, micro machining, welding, sintering and heat treatment. It is one of the thermal energy based unconventional process used for cutting of complex profile materials with high degree of precision and accuracy. All cutting parameters have significant influence on quality work. The aim of this study is to relate the CO₂ laser cutting parameters such as laser power and cutting power. The laser beam is typically 0.2mm in diameter with a power of 1-10 kW. Depending on the application selection of different gases are used in conjunction with cutting. Increasing the frequency and the cutting speed, decrease the kerf width and the roughness of cut surface, while increasing the power and gas pressure increases the kerf width and roughness. The relation between the input parameters and the response were investigated. The performance of laser cutting process mainly depends on laser parameter.

Keywords:-Laser cutting, Surface roughness, Process parameter, kerf width, CO₂, Heat affected zone

1. INTRODUCTION

In recent time technological advancement can be seen in every area. Laser cutting works by concentrating a high power pulsed laser at a specific location on the material to cut. The energy beam is absorbed into the surface of the material and the energy of the laser is converted into the heat, which melt or vaporize the material. It is a non-contact operative method hence a good precise cutting of complex shapes can be achieved. It can cut process material like ferrous metal, non-ferrous metal, stone, plastic, rubber and ceramic. There are many advantage of laser cutting over mechanical cutting, since the cut is performed by the laser beam, there is no physical contact with the material therefore contaminates or impurities cannot enter or get stuck into the

material. The advantages of laser cutting include high productivity thanks to the high cutting speeds, narrow kerf width which leads to minimum material lost, straight cut edges, low roughness of cut surfaces, low metallurgical distortions, and easy integration. The two main laser sources which are widely used in laser cutting are CO₂ and Nd:YAG lasers. Nd:YAG laser is an optically pumped solid state laser, working at a wave-length of 1.06 um. CO₂ laser is an electrically pumped gas laser that radiates at wavelength of 10.6 μm. The main operating parameters associated with laser used machining are: laser power, spot diameter of the laser beam, cutting speed, feed rate and depth of cut. The cut quality traits like Edge Surface Roughness (Ra) and Surface Hardness are considered as output parameters. The cut edge is cooled by the gas flow thus restricting the width of the Heat Affected Zone (HAZ). Maximization of the productivity and the cut quality along with Minimization of costs are goals of manufacturers with a limited theoretical and practical background to assist in systematical selection, laser process parameters are usually chosen on the basis of handbook values, other manufactures recommendations and by previous experience. Improper selection of cutting parameters cause high manufacturing costs, low product quality and high waste. The performance of laser cutting process mostly depends on laser parameters. By proper control of the cutting parameters, good quality cuts are possible at high cutting rates. Therefore, it is important to investigate the impact of cutting parameters on quality of cut.

2. WORKING PRINCIPLE

Laser cutting is a thermal, non-contact and highly automated process well suited for various manufacturing industries to produce components in large numbers with high accuracy and

surface finish. The highly flammable oxidized gas from the gas cylinder comes in the nozzle where it gets ignited with the amplified light and produces the high intense flame which imparts on the material and due to that the cutting action on the material takes place. This high intense flame may be of different gases mainly the gases used are CO_2 , O_2 , N_2 , etc. depending on the cutting parameters different gases with pressure are adjusted to produce the flame. The main objectives of this flames are Sublimating, Melting, and Burning. The cutting process is executed by moving focused laser beam along the surface of work piece at a constant distance, thereby generating a narrow cut kerf. This kerf fully penetrates the material along the desired cut contour.

This process is successful only if the melt zone completely penetrates the workpiece. Laser metal cutting is therefore generally restricted to thin section. While cutting has been reported through 100 mm sections of steel, the process is more typically used on metal sheets 6 mm or less in thickness.

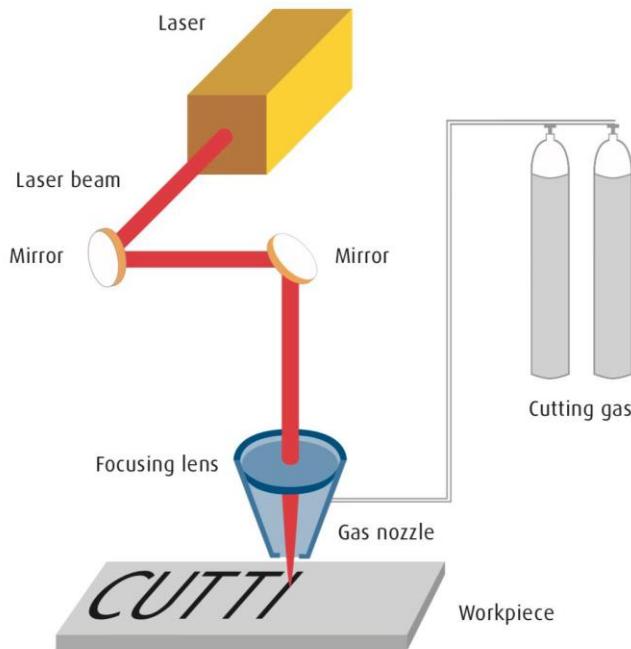


Fig 2.1 Schematic Diagram

3. PROCESS PARAMETER

The laser cutting has been a major area of research for the cutting of the metals. The various parameter affecting the cutting quality like cutting speed, focal point, laser power, gas pressure, etc. The various parameters are listed which affects the cutting process.

3.1 Surface roughness :- It is the effective parameter representing quality of a machined surface. K.A Ghany & M. Newishy [5] predicted that with the increase in cutting speed and frequency and decreasing laser power and gas pressure roughness reduces. The laser cut surface reveals a specific form of unevenness.

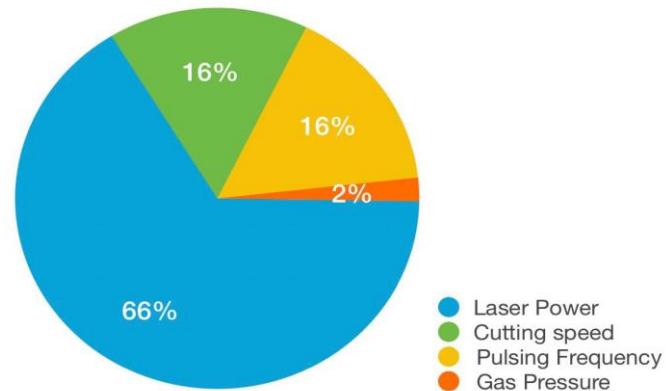


Fig 3.1

3.2 Kerf width:- The major portion cutaway by laser is known as kerf. The portion of cut is known as kerf width. The kerf width refers to the width of slot that is formed during through-thickness cutting and is normally narrower at bottom surface of workpiece than at the top surface. The kerf width shows the size of the cut and the amount of material wasted, therefore small diameter of laser is required for the less wastage of material. The width of the cut kerf corresponds to circular beam waist size which is determined mainly by the laser beam quality and focus optics.

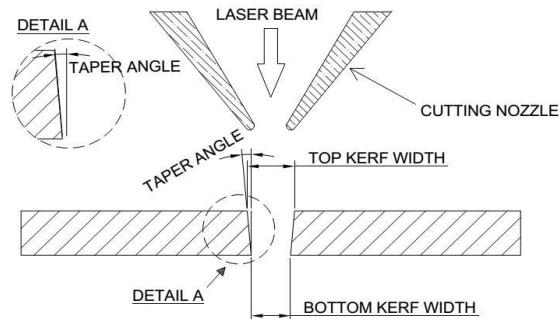


Fig 3.2 Kerf Width

3.3 Heat Affected Zone(HAZ):- The HAZ is something that occurs when metal is subjected to high temperature. It has negative impact on the design and structure of the metal. With the mechanical cutting, the shear strength of material surpasses. The majority of the energy converts into heat that influences both life span of the tools and metal to be cut. As increasing gas pressure and cutting speed results in an increase of HAZ width. As the gas pressure increases the power produced due to the exothermic reaction becomes higher and produces higher HAZ width. The increase in laser power and stand off distance results in decrease of HAZ width but their effect seems to be negligible than the effect of cutting speed and gas pressure.

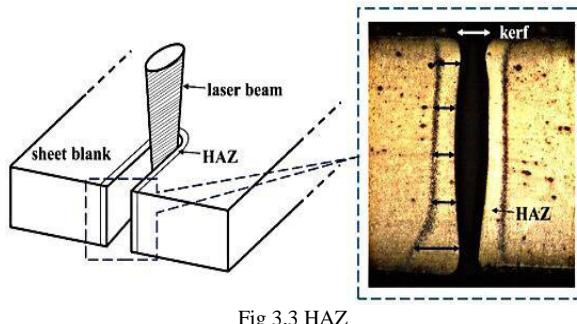


Fig 3.3 HAZ

3.4 Cutting Speed:- The cutting speed must be matched to the type and thickness of the workpiece. A speed which is too fast or too slow leads to increased roughness, burr formation and to large drag line. The energy balance for the laser cutting process is such that the energy supplied to the cutting zone is divided in two parts namely: energy used in generating cut and the energy losses from the cut zone. It is shown that the energy used in cutting is independent of the time taken to carry out the cut but the energy losses from the cut zone are proportion to the time taken. Therefore, the energy lost from the cut zone decreases with increasing cutting speed resulting into an increase in the efficiency of the cutting process. The cutting speed must be balanced with the gas flow rate and the power. When oxygen is applied in mild steel cutting, too low cutting speed results in excessive burning of the cut edge, which degrades the edge quality and increase the width of the Heat Affected Zone (HAZ). The speed must be decreased when cutting sharp corners with a corresponding reduction in beam power to avoid burning. The cutting speed for a material is inversely proportional to its thickness. As from the derived formula by [6] M.M Noor, K.Kadirgama and M.M rahman keeping power and tip distance constant and varying the speed of the nozzle the Ra value obtained are shown in fig.3.4.

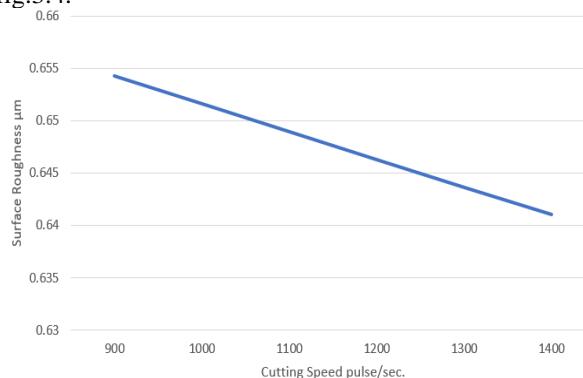



Fig 3.4 Cutting Speed vs Surface roughness

3.5 Laser Power:- The laser power must be adjusted to suit the type and thickness of the work-piece. A reduction in the laser power may be necessary to achieve high accuracy on complex shaped work-pieces or very small parts. Laser power is the total energy emitted in the form of laser light per second

while the intensity of the laser beam is the power divided by the area over which the power is concentrated. High beam intensity, obtained by focusing the laser beam to a small spot, is desirable for cutting applications because it causes rapid heating of the kerf leaving little time for the heat to dissipate to the surrounding which results into high cutting speeds and excellent cut quality. Additionally, reflectivity of most metals is high at low beam intensities but much lower at high intensities and cutting of thicker materials requires higher intensities. The optimum incident power is established during procedure development because excessive power results in a wide kerf width, a thicker recast layer and an increase in dross while insufficient power cannot initiate cutting. High power beams can be achieved both in pulsed and continuous modes; however, high power lasers do not automatically deliver high intensity beams. Therefore, the focus ability of the laser beam is an important factor to be considered.

3.6 Gas Pressure:- The material workpiece thickness must be matched to the gas pressure. When torch cutting, thin metal material is cut with higher gas pressure than thicker material. The pressure of gas must be regulated carefully, because the quality of cut is affected by even slight changes in the pressure of gas. If the pressure is too low, the fluid slag remains adhered to the base material, forming a permanent burr or closing the kerf again. If the pressure is too high, the lower edges of the cut are burnt out and often make the cut unusable. In contrast very high pressure cutting thicker workpieces are work at higher gas pressure.

3.7 Nozzle diameter and standoff distance :- The nozzle delivers the cutting gas to the cutting front ensuring that the gas is coaxial with the laser beam and stabilizes the pressure on the workpiece. The nozzle orifice determines the shape of the cutting gas jet and quality of cut. Mainly the diameter of nozzle ranges from 0.8mm – 3mm. Due to the smaller size of beam the cut kerf is often smaller than the diameter of nozzle. This distance influences the flow patterns in the gas, which have a direct bearing on the cutting performance and cut quality. Large variations in pressure can occur if the stand-off distance is greater than about 1mm. A stand-off distance smaller than the nozzle diameter is recommended because larger stand-off distances result in turbulence and large pressure changes in the gap between the nozzle and work piece, with a short stand-off distance, the kerf acts as a nozzle and the nozzle geometry is not so critical.

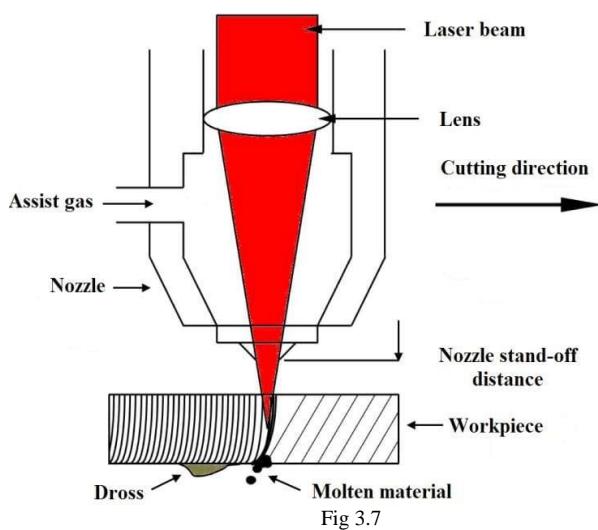

4. LITERATURE REVIEW

- i. In 2008, Avanish Dubey In laser beam cutting (LBC) process, It has been found that the kerf width during LBC is not uniform along the length of cut and the unevenness is more in case of pulsed mode of LBC[8,14]. In this paper, two kerf qualities such as kerf deviation and kerf width have been optimized simultaneously using Taguchi quality loss function during pulsed Nd: YAG laser beam cutting of aluminium alloy sheet (0.9 mm-thick) which is very difficult to cut material by LBC process. A considerable improvement in kerf quality has been achieved.
- ii. In March 2015, M Madic has been worked on an experimental analysis and optimization of CO₂ laser cutting process on stainless steel plates. In this paper, multi-objective optimization of the cut quality characteristics such as surface roughness, width of HAZ and kerf width in CO₂ laser cutting of stainless steel . The applied methodology integrates modelling of the relationships between the laser cutting factors (laser power, cutting speed, assist gas pressure and focus position) and cut quality characteristics using ANNs, formulation of the multi-objective optimization problem using weighting sum method and solving it by CSA (Comparative Sequence Analysis).Cuckoo search method is used for optimization purpose.
- iii. Yusof et al. (2008) have found that at all cutting speeds, the kerf width increases by increasing the laser powers while sideline length and percentage over length decreases by increasing laser power. Increasing the cutting speed in pulsed mode led to rough surface and incomplete cutting while in CW mode, increasing the cutting speed with equivalent increase in power, led to better quality and smoother cut surface upto 8 m/min cutting speed. The SR also increases by increasing the peak power, gas pressure, pulse frequency and duty cycle. The surface roughness of the cut specimen can also be changed by changing spot over lap and pulse width
- iv. In 2006 Miroslav and Predrag has worked on surface roughness by laser cut. Quality is very important. Observation of the cut surface can reveal two zones: the upper one in the area of the laser beam entrance side and the lower one, in the area of the laser beam exit side. The former is a finely worked surface with proper grooves whose mutual distance is 0.1...0.2 mm while the latter has a rougher surface characterized by the deposits of both molten metal and slag. Standard roughness R_z increases along with the sheet thickness, but decreases with increase of laser power. By cutting with laser power of 800 W standard roughness R is 10 µm for sheet thickness of 1 mm, 20 µm for 3 mm, and 25 µm for 6 mm. Correlation which connected the standard roughness (ten point height of irregularities) and mean arithmetic profile deviation, the linear and exponential relationships can be used.
- v. In 2012 Snežana Radonjić and Pavel Kovač has defined process parameter of laser machine Experimental research carried out during laser processing of AISI 314 resulted in an optimal cut . The optimal cut is obtained using the following processing parameters: feed rate 1250 mm/min, laser power 4400 W, focal point 16 mm, gas pressure 17 bars and nozzle distance 7 mm.
- vi. In august 2011 B.S.Yilbas has researches on Laser hole cutting into Ti-6Al-4V alloy and thermal stress analysis.
- vii. In April 2012 Martin Grepel, Marek Pagáč, Jana Petrušová researches on Laser Cutting of Materials of Various Thicknesses and found upon that suitable parameters for cutting Haynes .To avoid any influence of the surrounding atmosphere on the cut, it is suitable to measure the re- cast layer using a microprobe, and then to perform a microchemical analysis. We recommend that increased attention be paid to a study of the recast layer and its increased dependence on cutting parameters. It would be suitable to perform the micro- hardness measurement at the melting boundary of the original material and more importantly, on the recast layer itself. Our paper has contributed a comprehensive view on the influence of the process parameters on a narrow group of materials used in the aerospace industry.

5.CONCLUSION

By referring different review and research paper we can conclude that with the changes in the power the roughness of the material decreases, while the gas pressure also has great effect on the surface roughness but with the high speed the roughness increases any may leads to the increase wider kerf width. For different material different gases are used this parameter has a wider impact on the material roughness and surface finishing. Mainly the CO₂, O₂ and N₂ are mainly used for the cutting process but with the use oxygen gas the surface may some times the material gets cracked and leads to failure of workpiece. Gas pressure has a major effect on all the quality parameters, i.e., HAZ width, kerf width and roughness.

6.REFERENCES

- [1] S.L. Chen, The effects of gas composition on the CO₂ laser cutting of mild steel, *Journal of Materials Processing Technology*, Vol. 73 (1998), p. 147-59.
- [2] B.S. Yilbas, Laser cutting of thick sheet metals: Effects of cutting parameters on kerf size variations, *Journal of Materials Processing Technology*, Vol. 201 (2008), p. 285-90.
- [3] Thomas DJ, Optimising laser cut-edge durability for steel structures in high stress applications, *Journal of Constructional Steel Research*, Vol. 121 (2016), p. 40-9.
- [4] S.L. Chen, The effects of high-pressure assistant-gas flow on high-power CO₂ laser cutting: *Journal of Materials Processing Technology*, Vol. 88 (1999), p. 57-66.
- [5] K.A. Ghany, and M.Newishy, Cutting of 12mm thick austenitic stainless steel sheet using pulsed and CW Nd:YAG laser. *JMPT*, pages 438-447, 2005.
- [6] M. M. Noor1, K. Kadrigama1 and M. M. Rahman, ANALYSIS OF SURFACE ROUGHNESS FOR LASER CUTTING ON ACRYLIC SHEETS USING RESPONSE SURFACE METHOD, ISBN: 978-967-5080-9501. *Technology*, Vol. 44 (2012), p. 159-68.
- [7] Shubham Wadekar & Swapnil Deokar, Effect of process parameter on laser cutting process: *IJIR* , Vol.2 issue-7(2016),ISSN:2454-1362.
- [8] A. Cekic, D. Begic-Hajdarevic, M. Kulenovic and A. Omerspahic, CO₂ Laser Cutting of Alloy Steels Using N₂ Assist Gas: *Procedia Engineering*, Vol. 69 (2014), p. 310-5.
- [9] L.D. Scintilla and L. Tricarico, Experimental investigation on fiber and CO₂ inert gas fusion cutting of AZ31 magnesium alloy sheets, *Optics & Laser Technology*, Vol. 46 (2013), p. 42-52.
- [10] L.M. Wee and L. Li, An analytical model for striation formation in laser cutting, *Applied Surface Science*, Vol. 247 (2005), p. 277-84.
- [11] H.G. Salem, M.S. Mansour, Y. Badr and W.A. Abbas, CW Nd:YAG laser cutting of ultra low carbon steel thin sheets using O₂ assist gas, *Journal of Materials Processing Technology*, Vol. 196 (2008), p. 64-72.
- [12] Kai Chen, Y.L. Yao and Vijay Modi, Gas Dynamic Effects on Laser Cut Quality, *Journal of Manufacturing Processes*, Vol. 3 (2001), p. 38-49.
- [13] Yilbas B. S., "Effect of process parameters on the kerf width during the laser cutting process", *Proceedings of the Institution of Mechanical Engineers, Part B: Journal of Engineering Manufacture*, Volume 215, Number 10, 2001, ISSN: 0954-4054, pp. 1357 – 1365
- [14] V.Senthilkumar1, N.Periyasamy2, A.Manigandan3, "Parametric Investigation of Process Parameters for Laser Cutting Process" *International Journal of Innovative Research in Science, Engineering and Technology*, Vol. 4, Issue 5, May 2015.
- [15] Mayank N Madia, and Prof. Dhaval M Patel. Effect of Focal length of surface roughness of 1 mm thin Brass sheet by using assist gas O₂. *IJRSET*, pages 4539–4543, 2013.
- [16] A. Sharma and V. Yadava, Modelling and optimization of cut quality during pulsed Nd:YAG laser cutting of thin Al-alloy sheet for straight profile, *Optics & Laser*.
- [17] B.D.Prajapati,R.J.Patel, and B.C.Khatri. Parametric Investigation of CO₂ Laser Cutting of Mild Steel and Hardox-400 Material. *IJETAE*, 3(4):204–208, 2013.
- [18] A.Riveiro et al. The Role of the Assist Gas Nature in Laser Cutting of Aluminium Alloys. *Physics Procedia*, pages 548–554, 2011.
- [19] Arindam Ghosal, and Alakesh Manna. Response surface method based optimization of ytterbium fiber laser parameter during machining of Al/Al₂O₃-MMC. *Optics and Laser Technology*, pages 67–76, 2013.
- [20] P.S.Chaudhary, and Prof.D.M.Patel. Parametric effect fiber laser cutting on surface roughness in 5 mm thick mild steel sheet (IS-2062). *International journal of engineering research and technology*, 1(6), 2012.
- [21] Avanish Kumar Dubey, and Vinod Yadava. Optimization of kerf quality during pulsed laser cutting of aluminium alloy sheet. *Journal of materials processing technology*, pages 412–418, 2008.
- [22] Dipesh Patel, and Prof. D.M.Patel. Parametric Analysis of Ytterbium: fiber laser cutting process. 2010.
- [23] Introduction to Laser Material Processing by Columbia University.
- [24] P.K. Mishra. Non Conventional Machining. *Narosa Publication House*, pages 147–159, 2005.
- [25] Dr Mark Richmond (Product Manager at JK Fiber Lasers) and Dr Mo Naeem (Worldwide Applications Expert, GSI Group, Laser Division, Cosford Lane, Rugby, Warwickshire, CV21 1QN, UK). *Introduction to Fiber Lasers and their Applications*.