

Vehicles Charged Via Wireless Technology(Microwave Energy)

R.Shyamsunder, R.Rajkumar, S.Siddharth

THIAGARAJAR COLLEGE OF ENGINEERING, MADURAI


Abstract- Wireless Power Transmission (WPT) is an important aspect in every sector of science & technology. In this paper we present a model of Electric Vehicle (EV) charging with the help of renewable energy source using this WPT. We present a configuration, consist of two optimized square antennas in communication & tuned at mutual frequency with aim of showing the improvement of the size of the batteries & the power efficiency over longer distance. Through this wireless function Electric Vehicle system (EVs) get charged by microwave beam from transmitter & then receiver will capture thus microwave beam. This is then transferred into DC power & electrochemical storage is finally used to store the power. In this Li-ion battery replaces traditional fossil fuel system of automotive vehicles.

I. INTRODUCTION:

Our environment is being polluted by the fuel transport system severely because of the emission of CO₂, NO gases from the conventional vehicles. For fuel consumption & zero emission the Electric Vehicle (EV) transport system is more suitable & reliable in this Case. Today's hybrid EV, plug in EV becoming popular because of operating via electricity [1].

The microwave phased array transmitter will produce beam at 2.45GHz & 5.8GHz frequency from DC power & emit to vehicle rectenna which is set beneath the vehicle [2]. Finally the rectenna will convert the beam back to DC energy & store it via various mechanical & electrical devices. For this Li-ion battery has been introduced to store the energy for operating vehicles.

BLOCK DIAGRAM

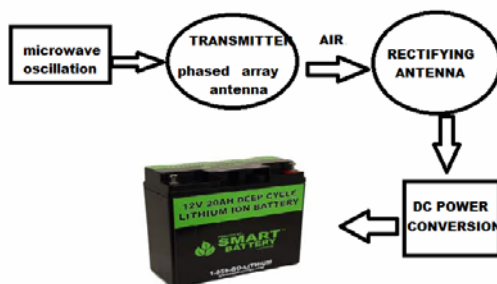

Wireless power can be transmitted via 3 techniques: Inductive coupling, Electromagnetic coupling & Microwave coupling [6]. It has been reported that inductive coupling techniques have high power transfer efficiency (on the order of 90%); however the power efficiency of such technique decreases for a longer distance drastically. This is used for very short lengths of

(1-3 cm). Online EV system also based on electromagnetic coupling has an underground electric coil. It is having efficiency 72% & the distance between transmitting & receiving antenna's is 170mm. but in Microwave coupling, the power based on microwave transmission has larger efficiency approximately 75-80% within the same distance as above [2].

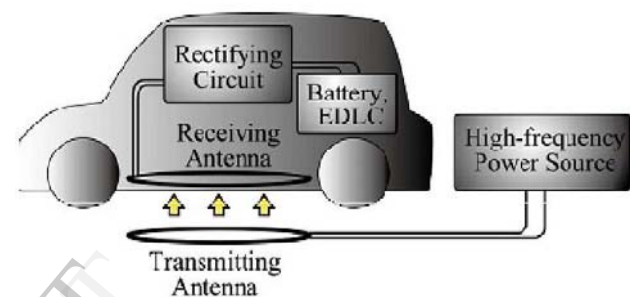


Figure 1: wireless car charging

II. HIGH POWER CONVERTER OF MICROWAVES INTO DC POWER

For many types of wireless power transmission (WPT) systems, diode-type rectenna (rectify antenna) is the best (and the simplest) device for back-conversion of microwaves into D.C. Diode-type rectennas have played and play a fundamental role at the stage of principal demonstration of the possibilities of high efficient wireless power transmission by microwaves. However they become not so much attractive for future real high power industrial WPT systems [4]. The first step is the generation of microwave power through various techniques as discussed below.

A. Microwave generation through oscillation :

Microwave oscillation for eg magnetron and klystron wave tubes are used as microwave beam production.

Klystron:

Klystrons amplify RF signals by converting the kinetic energy in a DC electron beam into radio frequency power. Klystron amplifiers have the advantage (over the magnetron) of coherently amplifying a reference signal so its output may be precisely controlled in amplitude, frequency and phase. The klystron amplifier is sensitive to the beam power supply variation. Typical values for a 3kW klystron have 8.5 kV for beam voltage. [7]

Travelling Wave Tubes (TWT) power supply:

A TWT integrated with a regulated power supply and protection circuits is referred to as a traveling-wave-tube amplifier.[3] A TWTA consists of a traveling-wave tube coupled with its protection circuits (as in *klystron*) and regulated powersupply. *Electronic power conditioner which may be supplied and integrated by a different manufacturer. A TWTA whose output drives an antenna is a type of transmitter. TWTA transmitters are used extensively in radar, particularly in airborne fire control radar systems and in electronic warfare and self protection systems.*


B. Transmitting beam by phase array antenna:

The antenna which is termed as the phased array transmitting antenna radiates microwave beam to electric car’s rectenna. Phase locked loop (PLL) Heterodyne system is needed to generate the microwave beam in the process [4].Some of the examples of Phase Locked Loop (PLL) which are based on the phased array antennas are,

- *Phased & Amplitude Controlled Magnetron (PACM):*
- *Phase Controlled Magnetron (PCM):*

III. ANTENNA OF ELECTRIC VEHICLE

Rectifying antenna is being used in the electric vehicle. Rectenna is defined as rectify ing antenna. A basic rectenna consists of an antenna, a dipole rectifier and a DC bypass filter. The rectennas with integrated circular sector antennas can eliminate the need of low pass filter (LPF) placed between the antenna and the diode as well as produce higher output with maximum efficiency [5]. The DC power is calculated from the microwave power.

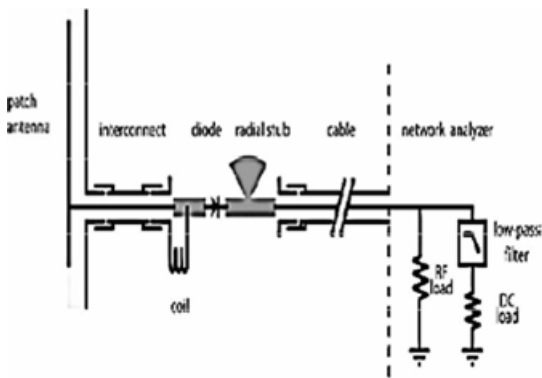

The DC power is calculated from the microwave power as given below

$$f_{high} = 4\pi$$

$$P = \int_{\Omega} \frac{1}{f_{high}} \cos^2(\theta, \phi, f) |s(\theta, \phi, f)|^2 A_{eff}(\theta, \phi) d\Omega df$$


$$f_{low} = 0$$

$$P(dc) = P(fi, t) \eta(p(fi, t), \rho, Zdc)$$

IV. RECTENNA CELL

Rectenna of the electric vehicle is capable of producing high conversion efficiencies around 90%. As it is having low atmospheric loss, cheap components availability.

The conversion efficiency is high of the CP rectenna [4]. This is given by transmission power, gain of rectenna, gain of transmitting power, output voltage, and gain of rectenna.

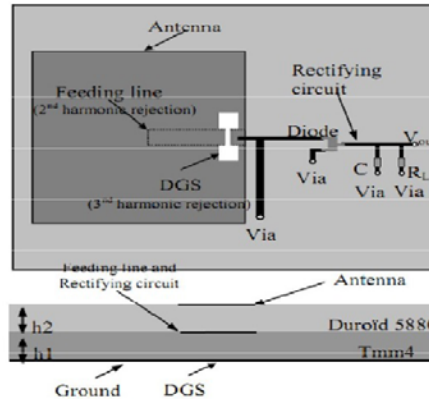

V. ENERGY STORAGE

A major impetus to the development of EVs is caused by the growth of the environmental problems such as global warming, pollution. Li-ion batteries are the most common and trustable power source for electric vehicle.

Advanced Flywheel Technology is the way of storing the energy. The flywheel is the system component responsible for the storing kinetic energy.

VI. CONCLUSION

In our model we have elaborated microwave conversion to DC power by several methods and analyzed an efficient energy storage system in the electric vehicle system. We used the Li-ion batteries for better storing capacity and used rectenna cell for the process so that it should be cost effective and more efficient.

Of course, additional feature could be required in order to the power gain of the optimized antenna over the longer distance. This also makes them sufficient in EVs recharging system.